




THE K-SERIES WALL MOUNTED INVERTER REVERSE CYCLE

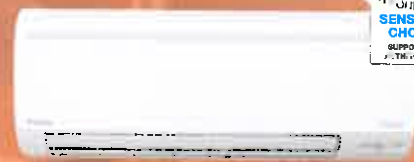

KEY FEATURES AND BENEFITS

Program Dry Function. The system rids the room of humidity while maintaining the temperature as much as possible, automatically controlling temperature and airflow, switching to cooling mode if the room temperature increases too much.

Indoor Unit Quiet Operation Function. Sound levels are reduced by up to 2-3 decibels (dB) from the low fan speed for quieter heating and cooling.

Intelligent Eye. This is an infrared motion sensor with the ability to sense movement in the room. When you are in the room, the air conditioner operates normally. If you leave the room for more than 20 minutes the air conditioner automatically changes to an energy-saving operation.

Comfortable Mode. The new flap changes the delivery angle to horizontal for cooling and vertical for heating operation, to prevent cold or warm air from blowing directly onto your body.

Air-Purifying Filter. Traps microscopic particles and decomposes odours to purify the air in your room.

Inverter Powerful Operation. Pushing the POWERFUL button on the remote control gives you a boost in cooling and heating power for a 20-minute period, even if the unit is already operating at high capacity.

Weekly Timer. This function makes it easy to enter up to four settings per day for each day of the week. It not only allows you to program on and off time, but also the desired temperature.

DAIKIN'S K-SERIES – QUIET, ENERGY EFFICIENT COMFORT FOR YOUR HOME.



SPECIFICATIONS

INDOOR UNIT		FTXS25KVMA	FTXS35KVMA	FTXS50KAVMA	FTXS60KAVMA	FTXS71KAVMA
OUTDOOR UNIT		RXS25KVMA	RXS35KVMA	RXS50KAVMA	RXS60KAVMA	RXS71KAVMA
Rated Capacity	Cool (kW)	2.5	3.5	4.8	5.1	6.6
	Heat (kW)	3.4	4.0	5.9	7.0	8.0
Capacity Range	Cool (kW)	1.3-3.2	1.4-4.0	1.7-6.0	1.7-6.7	2.3-8.5
	Heat (kW)	1.3-4.7	1.4-5.2	1.7-7.7	1.7-8.0	2.3-10.0
Energy Label/ Star Ratings	Cool	4	2.5	1.5	1.5	1.5
	Heat	4	3.5	2.5	2	2
Front Panel Colour		White				
Power Supply		1 phase, 220-240, 50Hz				
Power Input (Rated)	Cool (kW)	0.58	0.97	1.52	1.61	2.51
	Heat (kW)	0.79	0.99	1.61	2.06	2.89
E.E.R./C.O.P.	Cool/Heat	4.31/4.30	3.61/4.04	3.16/3.64	3.16/3.38	3.16/3.18
Dimensions (HxWxD)	Indoor (mm)	295x800x215			290x1050x250	
	Outdoor (mm)	550x765x285	550x765x285	735x825x300	735x825x300	770x900x320
Weight	Indoor (kg)	9	10	12	12	12
	Outdoor (kg)	34	34	48	48	71
Compressor Type		Hermetically sealed swing type				
Outdoor Operating Range (outdoor temp)	Cool (CDB)	10 to 46	10 to 46	10 to 46	10 to 46	10 to 46
	Heat (CWB)	-15 to 18	-15 to 18	-15 to 18	-15 to 18	-15 to 18
Indoor Sound Level (H/L)	Cool (dBA)	38/22	42/23	44/32	45/33	46/34
	Heat (dBA)	39/25	42/26	42/30	44/32	46/34
Outdoor Sound Level (H/L)	Cool (dBA)	46/43	48/44	47/44	49/46	52/49
	Heat (dBA)	47/44	48/45	48/45	49/46	52/49
Sound Power Level (H)	Outdoor (dBA)	62	63	62	63	66

NOTES:

1. The rated capacity is measured in accordance with AS/NZS 3823.1.2

2. The cooling (or heating) output capacity will be reduced below the rated value as the outdoor temperature approaches the maximum (or minimum) outdoor temperature operating range limit.

3. The specifications, designs & information in this flyer are subject to change without notice. Unit colours shown are as close as possible to actual unit colours. Colours depicted in this flyer may vary slightly.

Your Local Daikin Specialist Dealer:

