

Warning

- Daikin products are manufactured for export to numerous countries throughout the world. Prior to purchase, please confirm with your local authorised importer, distributor and/or retailer whether this product conforms to the applicable standards, and is suitable for use, in the region where the product will be used. This statement does not purport to exclude, restrict or modify the application of any local legislation.

- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion and may have resultant impacts on warranty.
- Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorised parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have any enquiries, please contact your local importer, distributor and/or retailer.

Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea, direct exposure to sea breeze should be avoided. If you need to install the outdoor unit close to the sea, contact your local distributor.

Organization:
DAIKIN INDUSTRIES, LTD.
AIR CONDITIONING MANUFACTURING
DIVISION
Scope of Registration:
THE DESIGN/DEVELOPMENT AND
MANUFACTURE OF COMMERCIAL AIR
CONDITIONING, HEATING, COOLING,
REFRIGERATING EQUIPMENT, HEATING
EQUIPMENT, RESIDENTIAL AIR
CONDITIONING EQUIPMENT, HEAT
RECLAIM VENTILATION, AIR CLEANING
EQUIPMENT, COMPRESSORS AND VALVES.



JMI-0107

Organization:
DAIKIN INDUSTRIES
(THAILAND) LTD.
Scope of Registration:
THE DESIGN/DEVELOPMENT
AND MANUFACTURE OF AIR
CONDITIONERS AND THE
COMPONENTS INCLUDING
COMPRESSORS USED FOR
THEM



JQA-1452

Scope of Registration:
THE DESIGN/DEVELOPMENT
AND MANUFACTURE OF AIR
CONDITIONERS AND THE
COMPONENTS INCLUDING
COMPRESSORS USED FOR
THEM



EC99J2044

Quality
ISO 9001
Daikin Australia
Pty Limited (ISO9001)
QEC23256 May 31, 2006
Sydney, Brisbane, Adelaide,
Melbourne, Newcastle,
Townsville, Perth, Auckland



EC99J2044

All of the Daikin
Group's business
facilities and
subsidiaries in Japan
are certified under the
ISO 14001
international standard
for environment
management.

Daikin Australia
Pty Limited (ISO14001)
CEM20437 October 27, 2006
Sydney, Brisbane, Melbourne,
Adelaide

Dealer

DAIKIN INDUSTRIES, LTD.

Head Office:
Umeda Center Bldg., 2-4-12, Nakazaki-Nishi,
Kita-ku, Osaka, 530-8323 Japan

Tokyo Office:
JR Shinagawa East Bldg., 2-18-1, Konan,
Minato-ku, Tokyo, 108-0075 Japan
http://www.daikin.com/global_ac/

© All rights reserved
09/12 DN

• Specifications, designs and other content appearing in this brochure are current as of September 2012 but subject to change without notice.



The Comfort and Luxury You Deserve



SUPER MULTI NX



Multi-Split Type Air Conditioners L series
With DC Inverter and Swing Compressor
Cooling Only & Heat Pump [50 Hz]



R-410A



Air condition multiple rooms in your home with a single outdoor unit.

Super Multi NX is the knowledgeable choice.


The Daikin Super Multi NX lets you build a highly efficient multi room air conditioning system by connecting up to five indoor units to a single outdoor unit. The series includes a wide variety of indoor units, so it is easy to select a model that blends in unobtrusively. A single compact outdoor unit allows you to make more efficient use of available space in the installation location, such as a balcony. The individual indoor units in different rooms—the living room, study, and bedrooms, for example—can be controlled independently to match your family's lifestyle. Super Multi NX can make your home more comfortable.

Contents

Concepts	3
Main features	5
Product lineup	9
Functions	19
Specifications	23
Options	26
Capacity tables	27

Key concepts for Super Multi NX

Enjoy the comfort and luxury of your dreams.

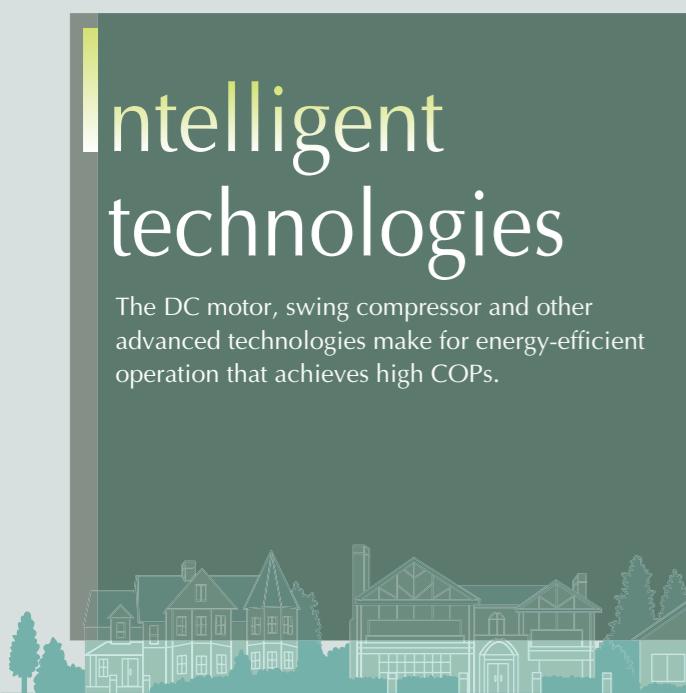

Intelligent technologies

The DC motor, swing compressor and other advanced technologies make for energy-efficient operation that achieves high COPs.



Ideal environment

The quiet operation mode helps create a more pleasant living environment. DC inverter power control provides comfortable temperature control.



Interior & exterior flexibility

The wide range of indoor unit options provides ample choice. A single compact outdoor unit reduces installation space requirements, while long maximum piping lengths provide flexibility for connections.






Individual control

The individual indoor units in different rooms can be controlled independently. The priority-room setting function lets you specify a room to receive preference in air conditioning operation.

SUPER MULTI NX

In 1969, Daikin developed the first multi room air conditioning system in Japan that needed just one outdoor unit. Over the ensuing 40 years, Daikin has built an enviable reputation with the constant progress of its technology. Super Multi NX requires only a single outdoor unit to maintain comfort in up to five rooms. Where outdoor unit installation space is limited, it is the ideal choice. Air conditioner settings for each room can be controlled individually to suit the preference of each person. While optimising personal comfort, Super Multi NX uses DC inverter technology, making it energy efficient.

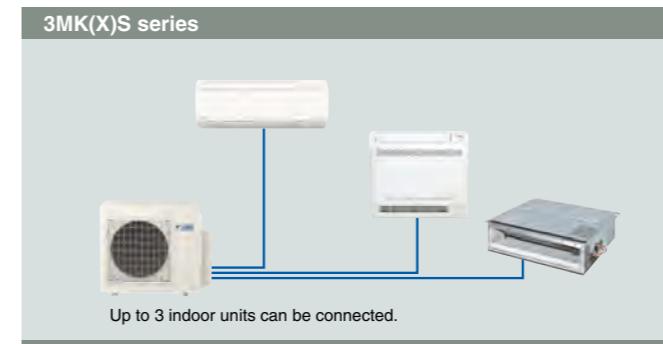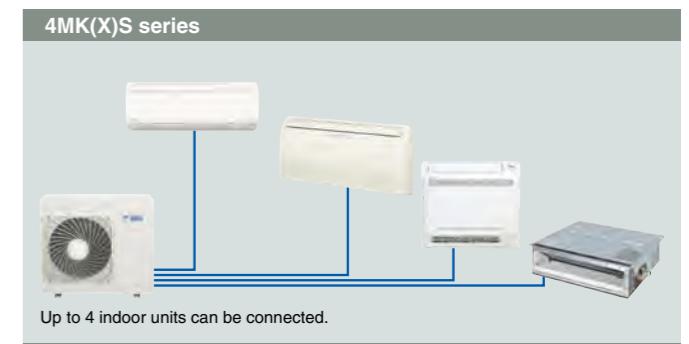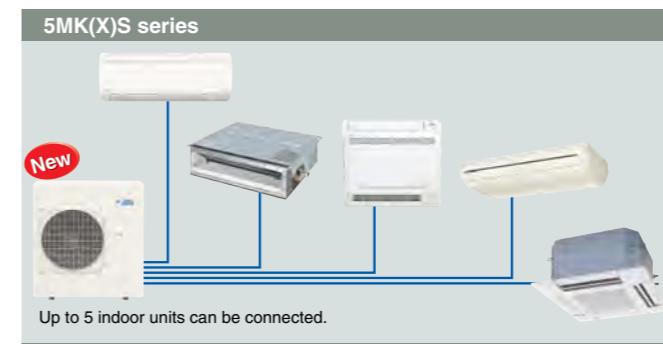

Connect 5 indoor units to a single outdoor unit

Intelligent technologies

High energy efficiency through advanced technologies delivers high COP.



High energy efficiency

5MXS100LVMA

	Cooling operation	Heating operation
COP	3.65	4.58

* During rated capacity operation of 5 indoor units (2.0 + 2.0 + 2.0 + 2.0 + 2.0 kW class).

What is COP?

An air conditioner's COP (coefficient of performance) indicates how efficiently it uses energy. A high COP means high energy efficiency.


$$\text{COP} = \frac{\text{Capacity (W)}}{\text{Power consumption (W)}}$$




Daikin energy-efficient technologies



① Swing compressor

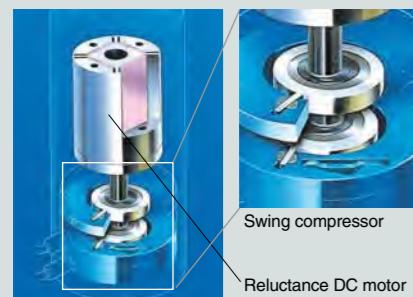

Thanks to its smooth rotation, the swing compressor decreases friction and vibration. It also prevents the leakage of refrigerant gas during compression. These advantages provide quiet and efficient operation.

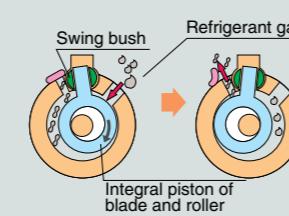


The swing compressor can reduce operational vibration and sound because its piston moves smoothly inside the compressor.

② Reluctance DC motor



The use of a Reluctance DC motor with neodymium magnets¹ for our compressors has improved motor efficiency by more than 20% compared to AC motors. The high torque² and stronger magnetic force produced is beneficial particularly at low load conditions.


¹A neodymium magnet is approximately 10 times stronger than a standard ferrite magnet.
²The torque created by the change in power between the iron and magnet parts.

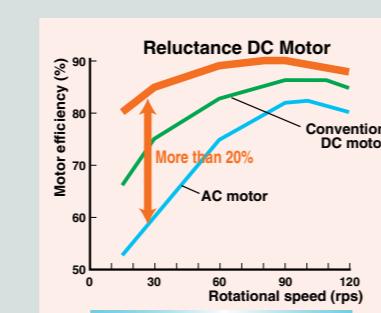

Note: Data are based on studies conducted under controlled conditions at a Daikin laboratory.

③ PAM control

Pulse Amplitude Modulation (PAM) control reduces energy loss by controlling the amount of switching on/off of the converter.

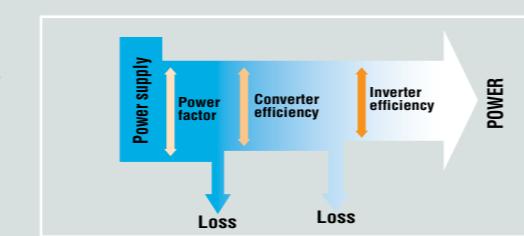

Convenient features to create your ideal environment



Ideal environment

Quiet operation



Indoor unit



Super Multi NX offers the quiet sound level of 22 dB (A) during Indoor Unit Quiet Operation of the FTXS20/25 during cooling operation.

Note: Capacity may decrease when quiet functions are selected.

22 dB (A) is so quiet you can even hear whispers

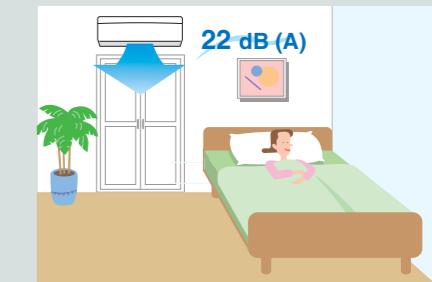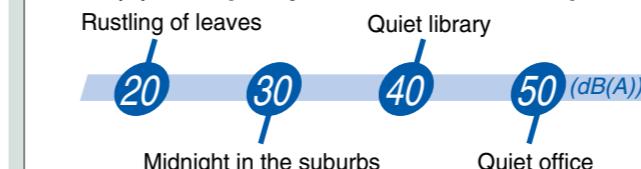

Outdoor unit




Super Multi NX achieves a quiet sound level of 43 dB (A) during Outdoor Unit Quiet Operation or Night Quiet Mode of the 3MXS52 during cooling operation.

Note: Capacity may decrease when quiet functions are selected.

Comfortable temperature control

Non-inverter air conditioners can only perform simple on/off operation. They start operation when the temperature rises and stop when the room reaches the set temperature and then switch to low-capacity operation. As a result, inverter air conditioners are more energy efficient and comfortable than non-inverter air conditioners.

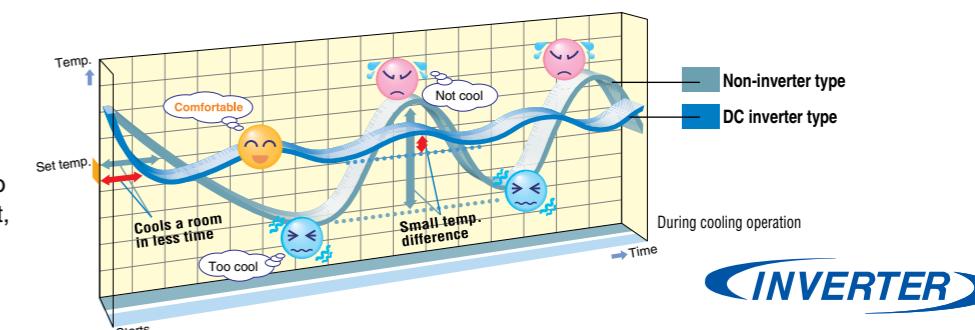


* This diagram is a representation for illustrative purposes only.

Wide operation range

With Super Multi NX, cooling operation is possible even during lower outdoor temperatures.

Note: This information is for heat pump type.

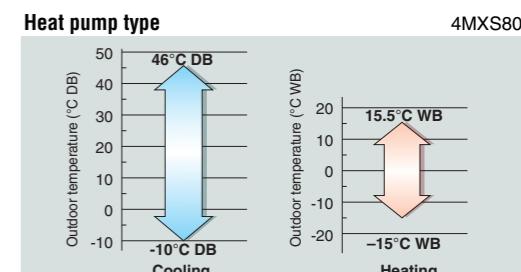

Interior & exterior flexibility

Wide range of choices to match your interior



Stylish indoor units for elegant interiors



The stylish panel design of the wall-mounted type provides an excellent match for interiors.



The compact and simple design blends in with the type of room.



Only 240 mm is required above the ceiling for installation.

Compact outdoor units for a less obtrusive exterior look

The system requires only a single outdoor unit. The compact design provides installation flexibility and takes up less space, for a less obtrusive exterior look.



Long piping lengths for installation flexibility

The ample maximum piping length of 80 m permits more freedom in the placement of air conditioner units and facilitates the optimisation of interior space.

Model name	3MKS58	3MKS68	4MKS80	5MKS100	
	3MXS52	3MXS68	4MXS80	5MXS100	
Max. piping length	Total	50 m	60 m	70 m	80 m
	For one room		25 m		30 m



Individual control for each room to match your family's lifestyle



Individual control

Preferential air conditioning Initial setting required during installation



Priority-Room Setting delivers priority capacity to a prioritised room when using multi-split air conditioners. After a priority room is selected, it receives preferential air-conditioning plus priority control over the 3 functions below.

① Priority setting with Inverter Powerful Operation



When Inverter Powerful Operation is selected in the priority room, the indoor unit capacity in the priority room is increased by shifting capacity from units in other rooms. After 20 minutes, all units automatically return to their original settings.

Note: Capacity in other rooms may decrease slightly.



② Priority setting with operation mode

The operation mode (cooling/heating) of the indoor unit in the priority room is given preference. When the operation modes of the units in other rooms are different from the unit in the priority room, the units in the other rooms wait on standby.

Note: Operation mode can not be changed from other rooms.

③ Priority setting with Outdoor Unit Quiet Operation



Priority-Room Setting also allows Outdoor Unit Quiet Operation to be selected by one command* from the priority room.

* If Priority-Room Setting has not been set, the Outdoor Unit Quiet Operation button must be pushed on the wireless remote controller of all indoor units operating at that time.

Convenient remote controllers

A variety of convenient controller systems permit individual control of settings such as temperature, airflow volume, and operation duration.



A wide range of models to choose from that deliver comfort and convenience

Outdoor unit

Model	Model name	Capacity class	Max. piping length	Max. height difference
Connectable to up to 3 indoor units				
Cooling only	3MKS58LVMA	5.8 kW	50 m	15 m
Heat pump	3MKS68LVMA	6.8 kW	60 m	15 m
Connectable to up to 4 indoor units				
Cooling only	4MKS80LVMA	8.0 kW	70 m	15 m
Heat pump	4MXS80LVMA	8.0 kW	70 m	15 m
Connectable to up to 5 indoor units New				
Cooling only	5MKS100LVMA	10.0 kW	80 m	15 m
Heat pump	5MXS100LVMA	10.0 kW	80 m	15 m

Indoor unit

Model	Capacity class	2.0 kW	2.5 kW	3.5 kW	5.0 kW	6.0 kW	7.1 kW
Wall-mounted type							
Cooling only	FTKS20KVMA	FTKS25KVMA	FTKS35KVMA				
Heat pump	FTXS20KVMA	FTXS25KVMA	FTXS35KVMA				
Duct-connected type							
Cooling only	CDKS25EAVMA	CDKS35EAVMA					
Heat pump	CDXS25EAVMA	CDXS35EAVMA					
Floor-standing type							
Cooling only	CDKS25CVMA	CDKS35CVMA	CDKS50CVMA	CDKS60CVMA			
Heat pump	FDXS25CVMA	FDXS35CVMA	FDXS50CVMA	FDXS60CVMA			
Floor/ceiling-suspended dual type							
Cooling only	FLXS25BVMA	FLXS35GVMA	FLXS50GVMA	FLXS60GVMA			
Heat pump	FFQ25BV1B	FFQ35BV1B	FFQ50BV1B	FFQ60BV1B			
Compact multi flow ceiling-mounted cassette type							
Cooling only	FFQ25BV1B	FFQ35BV1B	FFQ50BV1B	FFQ60BV1B			
Heat pump	FFQ25BV1B	FFQ35BV1B	FFQ50BV1B	FFQ60BV1B			

An array of indoor unit models with innovative and attractive designs make it easy to find the ideal match for each room in your home.

Wall-mounted type	Floor-standing type	Duct-connected type
An attractive match for large rooms with refined interiors is provided by the stylish panel design.		

Floor/ceiling-suspended dual type

Choose either ceiling-suspended or floor-level installation for this attractive model with a beautiful, rounded design.



Compact multi flow ceiling-mounted cassette type

The compact and flexible design is suited to commercial spaces such as offices.



Possible combinations for indoor and outdoor units

Model	Capacity class	2.0 kW	2.5 kW	3.5 kW	5.0 kW	6.0 kW	7.1 kW
Cooling only							
3MKS58L		●					
3MKS68L		●	●				
4MKS80L		●	●	●			
5MKS100L		●	●	●	●	●	●
Heat pump							
3MXS52L		●					
3MXS68L		●	●				
4MXS80L		●	●	●			
5MXS100L		●	●	●	●	●	●

Wall-Mounted Type



Option

2.0 kW class 2.5 kW class 3.5 kW class

Cooling only FTKS20KVMA FTKS25KVMA FTKS35KVMA

Heat pump FTXS20KVMA FTXS25KVMA FTXS35KVMA



* Heat pump only



Option

5.0 kW class 6.0 kW class 7.1 kW class

Cooling only FTKS50KAVMA FTKS60KAVMA FTKS71KAVMA

Heat pump FTXS50KAVMA FTXS60KAVMA FTXS71KAVMA



* Heat pump only



Evenly distributed air



Vertical and horizontal airflow is controlled by Power-Airflow Dual Flaps and Wide-Angle Louvers working in tandem, realising even distribution of air.



During cooling the Power-Airflow Dual Flaps flatten out to deliver air to the farthest corners of the room.




During heating the near-vertical flaps direct air to the floor to quickly warm the room.

Comfort airflow mode



Comfort Airflow Mode prevents uncomfortable drafts from blowing directly on to your body. With this function, when you press the COMFORT button during cooling operation, the flap moves upward to prevent direct cold drafts. During heating operation, it also moves downward to prevent direct drafts and deliver warm air to the floor.

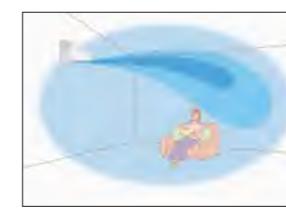

Cooling operation



Heating operation

3-D airflow

3-D Airflow combines Vertical and Horizontal Auto-Swing to circulate air to every part of a room for uniform cooling/heating of even large spaces.



Weekly timer



The remote controller with a backlit liquid crystal display and luminescent control buttons also features a built-in Weekly Timer that can be programmed to suit your lifestyle, with up to four actions per day for each day of the week. This controller not only allows you to programme on and off times, but also the desired temperature during those times. Furthermore, the 'copy' function enables any daily programme to be replicated on any other day or days as required.



Intelligent eye



Intelligent Eye with its infrared sensor automatically controls air conditioner operation according to human movement in a room. When there is no movement, it adjusts the temperature by $\pm 2^{\circ}\text{C}$ for energy efficiency.



When you are in the room.




When you go out.

Econo mode



Econo Mode is a function that reduces the maximum running current and the maximum power consumption of the outdoor unit to the rated values. This mode is useful for preventing circuit breakers from being overloaded by the use of multiple air conditioners and other electrical devices. The function is easily activated from the remote controller by pushing the ECONO button.

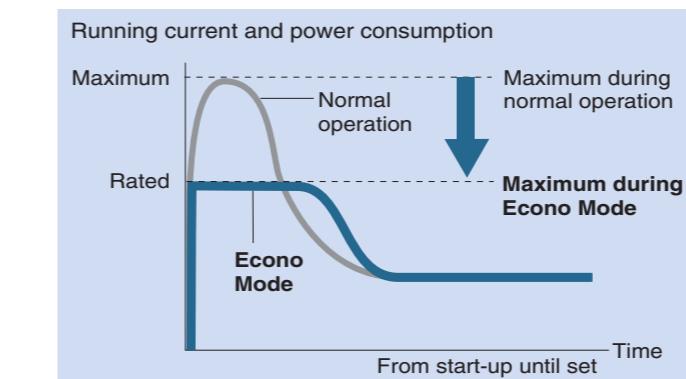

- This diagram is a representation for illustrative purposes only.
- Maximum capacity decreases during Econo Mode, requiring more time to reach the set temperature.

Clean air



Uses a Titanium Apatite Photocatalytic Air-Purifying Filter. Titanium apatite is a photocatalytic material with high adsorption power. It effectively adsorbs and removes bacteria.


These filters are not medical devices. Benefits such as the adsorption and decomposition of bacteria are only effective for substances that are collected on and in direct contact with the Titanium Apatite Photocatalytic Air-Purifying Filter.

Bacteria Removal Test

Testing method: dropping method

Result certificate: No. 012553-1 and 012553-2

Testing organisation: Japan Spinners Inspecting Foundation

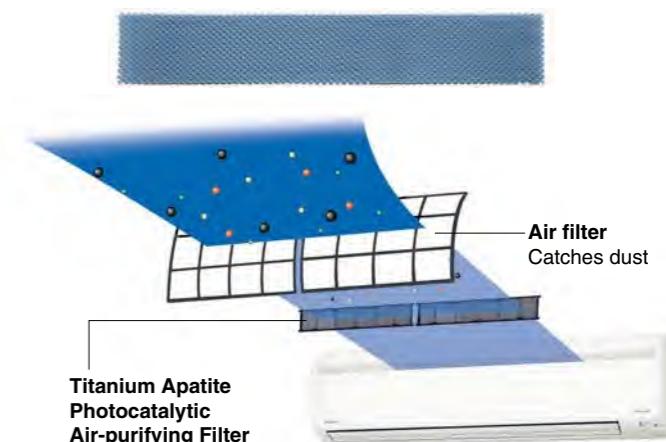

Quiet operation



Wall-mounted type indoor units achieve quiet sound level of 22 dB (A) during Indoor Unit Quiet Operation.

(H/L/**SL**)

FTXS20 FTXS25 FTXS35

38/25/22 dB(A) 42/26/23 dB(A)

During cooling operation

* Capacity may be affected.

Easy cleaning



Flat panel can be cleaned with just a single pass of a cloth across its smooth surface.



Floor-Standing Type



2.5 kW class 3.5 kW class 5.0 kW class

Heat pump **FVXS25KV1A FVXS35KV1A FVXS50KV1A**




Stylish and compact flat panel

The clever construction of the elegant flat panel unit allows the flexibility of fully exposed installation against a wall or semi-recessed installation in spaces such as in a mantelpiece.



Exposed portion of unit only 115 mm thick, allowing for installation almost anywhere.

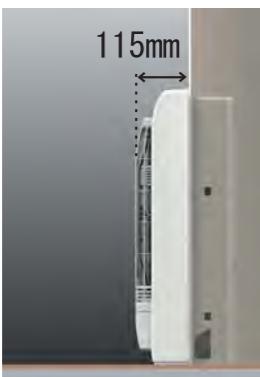

Easier cleaning

The flat panel design makes cleaning the front face of the unit a breeze. Surface dust can be simply wiped away with a soft cloth. Furthermore, the unit can be installed off the floor to allow for cleaning of the floor space under the unit.



Wiping clean the flat panel is a breeze.



Easily clean beneath the unit.

Dual air discharge for enhanced comfort


Daikin's inverter floor standing split systems are especially effective in heating. The unit features dual air outlets that diffuse warm air at floor level, and vertical auto swing louvers on the top air outlet, providing uniform distribution of heated air in the room.

In warmer months, the lower air outlet can be shut off, leaving the top air diffuser to stream cool refreshing air upwards.



Double airflow keeps feet warm during heating operation.

Clean air

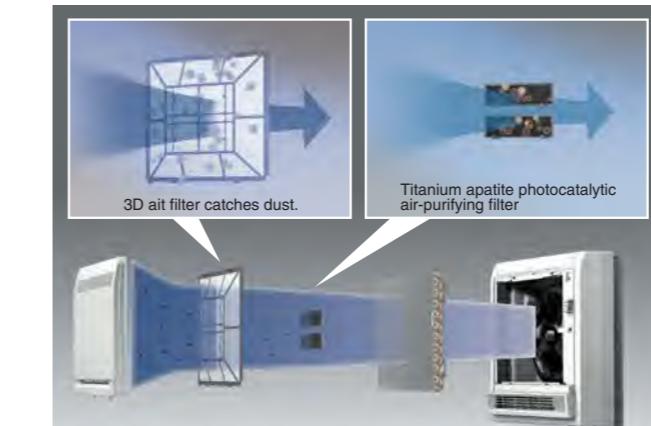

Internal structure

Uses a Titanium Apatite Photocatalytic Air-Purifying Filter. Titanium apatite is a photocatalytic material with high adsorption power. It effectively adsorbs and removes bacteria.

These filters are not medical devices. Benefits such as the adsorption and decomposition of bacteria are only effective for substances that are collected on and in direct contact with the Titanium Apatite Photocatalytic Air-Purifying Filter.

Bacteria Removal Test

Testing method: dropping method

Result certificate: No. 012553-1 and 012553-2

Testing organisation: Japan Spinners Inspecting Foundation

Versatile remote control



The remote controller with a backlit liquid crystal display and luminescent control buttons also features a built-in Weekly Timer that can be programmed to suit your personal lifestyle, with up to four actions per day for each day of the week. This controller not only allows you to programme on and off times, but also the desired temperature during those times. Furthermore, the 'copy' function enables any daily programme to be replicated on any other day or days as required. Correct programming of the unit may also result in energy efficiency.



Stylish design



The LCD panel with backlight

A luminescent material is used for the buttons on the surface.

User friendliness and operation in dark rooms, such as bedrooms at night, has been improved.

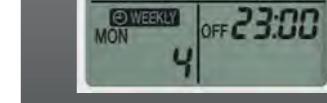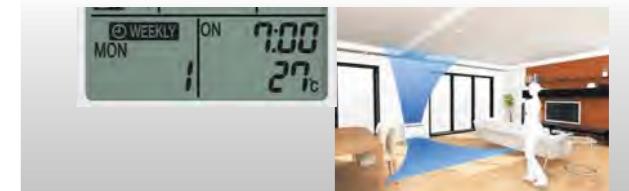

Duct-Connected Type



2.5 kW class 3.5 kW class 5.0 kW class 6.0 kW class

〈700 mm width type〉

Cooling only CDKS25EAVMA CDKS35EAVMA

Heat pump CDXS25EAVMA CDXS35EAVMA

〈900/1,100 mm width type〉

Cooling only CDKS25CVMA CDKS35CVMA CDKS50CVMA CDKS60CVMA

Heat pump FDXS25CVMA FDXS35CVMA FDXS50CVMA FDXS60CVMA



* Heat pump only



Slim and compact design

Models in the CDK(X)S25/35EA series are only 700 mm in width and 21 kg in weight, so are easily installed in limited spaces. Just 200 mm in height, all models can be installed in rooms with as little as 240 mm depth between the drop ceiling and ceiling slab, making them ideal for even shallow ceilings.

CDK(X)S25/35EA




Signals from the wireless remote controller are transmitted to the signal receiver.

	CDK(X)S25EA	CDK(X)S35EA	C(F)DK(X)S25C	C(F)DK(X)S35C
Dimensions (H x W x D)	200 x 700 x 620 mm	200 x 900 x 620 mm		
Weight	21 kg	25 kg		
Airflow rate (H)	145 ℥/s	158 ℥/s	167 ℥/s	
External static pressure	30 Pa	40 Pa		

Quiet operation

Quiet operation sound level of only 29 dB (A) is achieved for 2.5 kW class models.

* Capacity may be affected.

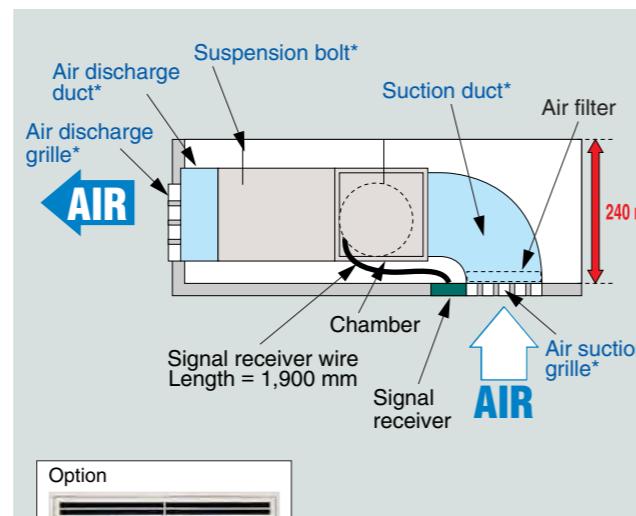

* Locally obtained parts

Notes:

- To prevent an increase in operation sound, avoid installing the air suction grille directly below the suction chamber.
- Grilles, piping connections, ducts, and installation parts should be obtained locally.
- Duct-connected types do not have drain pumps.
- The signal receiver unit must be located near the air suction inlet, because the unit includes a sensor that detects room temperature.

Floor/Ceiling-Suspended Dual Type



2.5 kW class 3.5 kW class 5.0 kW class 6.0 kW class

Heat pump FLXS25BVMA FLXS35GVMA FLXS50GVMA FLXS60GVMA




Two-way installation

The rounded design of these slim and lightweight units makes them the suitable choice for rooms without false ceilings. Ceiling-suspended installation frees up floor and wall space, and floor-level installation is possible without loss of warm air.

Comfortable airflow

Vertical Auto-Swing and Wide-Angle Louvers realise a comfortable airflow spreading throughout a large room, air-conditioning the whole room evenly.

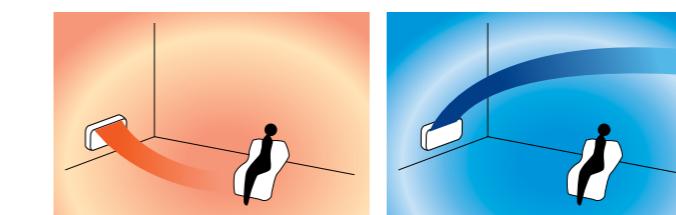

Quiet operation

The FLXS25 achieves the quiet sound level of 28 dB (A). Indoor Unit Quiet Operation decreases the operation sound by 2 or 3 dB (A) from the low setting fan speed.


FLXS25	FLXS35	FLXS50	FLXS60
37/31/28 dB(A)	38/32/29 dB(A)	47/39/36 dB(A)	48/41/39 dB(A)

During cooling operation

* Capacity may be affected.




Ceiling-Suspended Installation

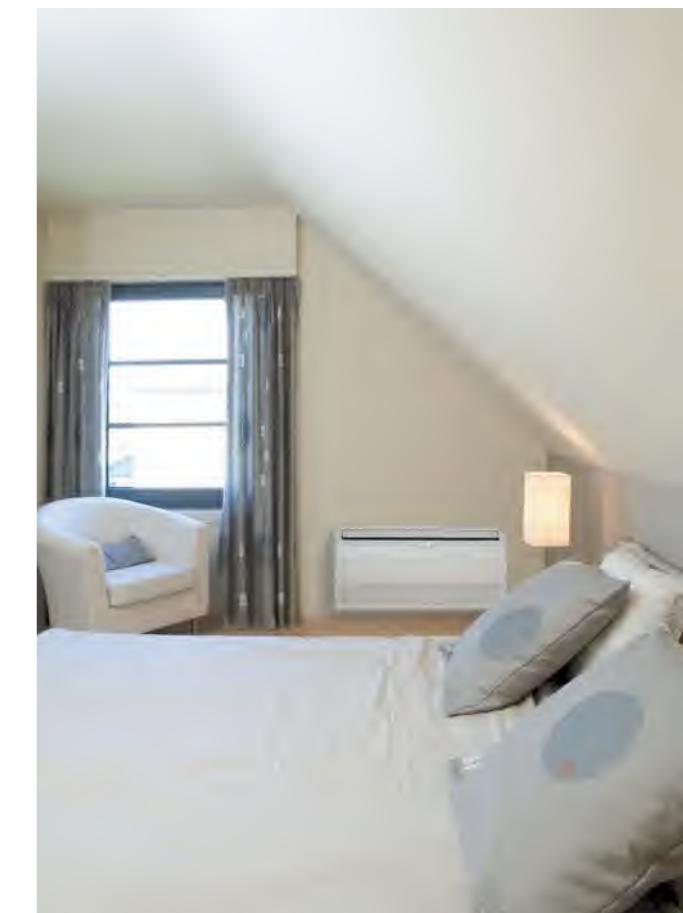


Floor-Level Installation

Easy-to-use wireless remote controller

FTK(X)S20/25/35/50/60/71

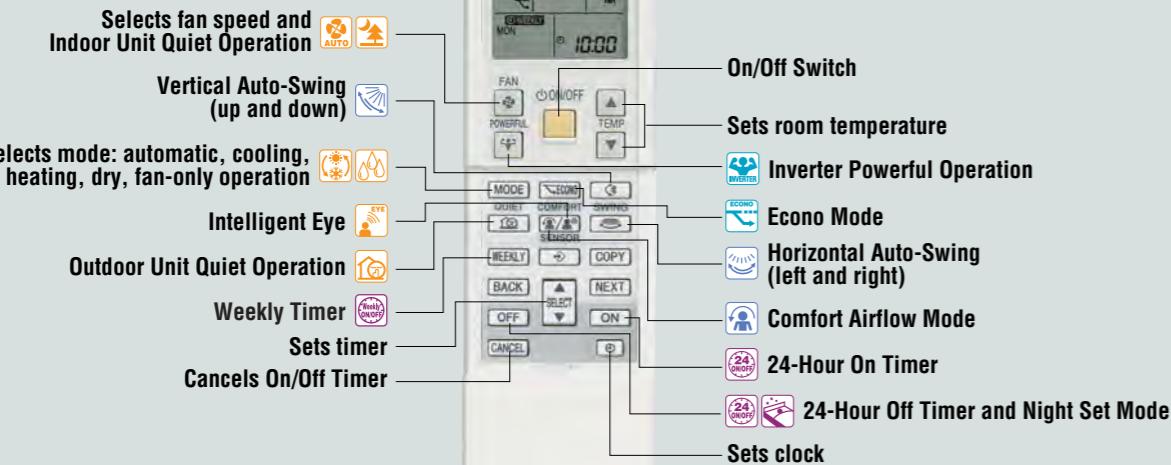

FVXS25/35/50

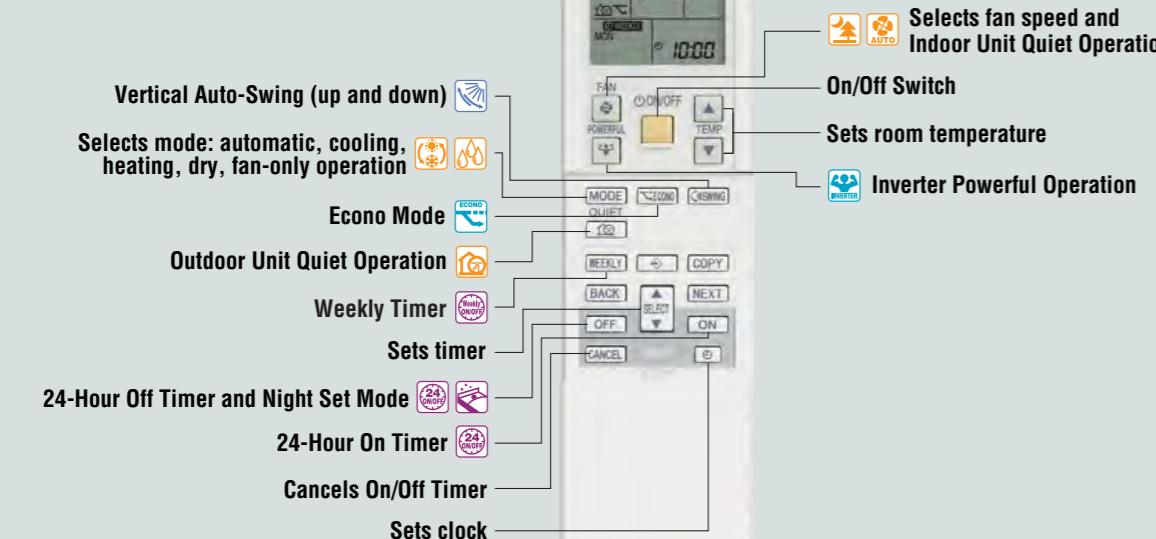

Models	Indoor unit					Outdoor unit
	Wall-mounted type	Duct-connected type	Floor-standing type	Floor/ceiling-suspended dual type	Compact multi flow ceiling-mounted cassette type	
FTK(X)S20/25/35	CDK(X)S/FDXS	FVXS	FLXS		FFQ	
FTK(X)S50/60/71						
Comfortable Airflow						
Power-Airflow Dual Flaps						
Wide-Angle Louvres						
Vertical Auto-Swing (up and down)						
Horizontal Auto-Swing (left and right)						
3-D Airflow						
Comfort Airflow Mode						
Comfort Control						
Indoor Unit Quiet Operation						
Outdoor Unit Quiet Operation						
Night Quiet Mode						
Intelligent Eye						
Automatic Operation (Heat pump type only)						
Programme Dry Function						
Auto Fan Speed						
Lifestyle Convenience						
Inverter Powerful Operation						
Econo Mode						
Home Leave Operation						
Indoor Unit On/Off Switch						
Priority-Room Setting						
Cleanliness						
Titanium Apatite Photocatalytic Air-Purifying Filter						
Photocatalytic Deodorising Filter						
Air-Purifying Filter						
Wipe-Clean Flat Panel						
Filter Cleaning Indicator						
Timers						
24-Hour On/Off Timer						
72-Hour On/Off Timer						
Weekly Timer						
Night Set Mode						
Worry Free						
Auto-Restart after Power Failure						
Self-Diagnosis with Digital Display						
Anticorrosion Treatment of Outdoor Heat Exchanger Fins						

Comfortable Airflow

Power-Airflow Dual Flaps

Power-Airflow Dual Flaps can flatten out during cooling operation to deliver cool air to the corners of a room. The flaps can direct warm air straight down to the floor during heating operation.

Wide-Angle Louvres

Smoothly curved Wide-Angle Louvres provide wide airflow coverage for effective cooling/heating operation.

Vertical Auto-Swing (up and down)

Vertical Auto-Swing automatically moves the flaps up and down to distribute air across a room.

Horizontal Auto-Swing (left and right)

Horizontal Auto-Swing automatically moves the louvres to the left and right to cover a room with cool/warm air.

3-D Airflow

This function combines Vertical and Horizontal Auto-Swing to circulate a cloud of cool/warm air right to the corners of even large spaces.

► See page 11

Comfort Airflow Mode

This function prevents uncomfortable drafts from blowing directly on to the body. The flap changes the airflow direction. To prevent drafts, the flap moves upward during cooling operation and downward during heating operation.

► See page 11

Comfort Control

Indoor Unit Quiet Operation

Indoor unit operating sound level is decreased by 2 or 3 dB (A) from the low setting fan speed using the wireless remote controller.

► See page 6

Outdoor Unit Quiet Operation

Outdoor unit operating sound level is decreased by 3 dB (A) from the rated operation sound using the wireless remote controller.

► See page 6

Night Quiet Mode

Outdoor unit operating sound level is automatically decreased by 3 dB (A) from the rated operation sound when the outdoor temperature has dropped by 6°C from the maximum temperature recorded during the daytime. Initial setting is required during installation.

Intelligent Eye

Intelligent Eye with its infrared sensor automatically controls air conditioner operation according to human movement in a room. When there is no movement, it adjusts the temperature by ± 2°C for energy efficiency.

Automatic Operation

This function automatically selects cooling or heating operation mode based on the room temperature at start-up.

Programme Dry Function

This function automatically reduces the level of humidity.

Auto Fan Speed

The microprocessor automatically controls fan speed to adjust the room temperature to the set temperature.

Lifestyle Convenience

Inverter Powerful Operation

This function is convenient for boosting cooling/heating performance for a 20-minute period both when you first turn on your air conditioner and want to quickly change the room temperature.

Econo Mode

Econo Mode reduces the maximum running current and maximum power consumption of the outdoor unit to the rated values. This is useful when using multiple air conditioners and other electrical devices at the same time.

Home Leave Operation

Home Leave Operation continues operation to prevent a room from becoming too hot or cold while you are sleeping or out of your home. Select any temperature from 18 to 32°C for cooling operation and 10 to 30°C for heating operation.

Indoor Unit On/Off Switch

The unit can be conveniently started manually in the event the wireless remote controller is misplaced or the wireless remote controller batteries are not charged.

Priority-Room Setting

When this function is set, it is convenient for selecting Inverter Powerful Operation, Outdoor Unit Quiet Operation and operation mode. Initial setting is required during installation.

► See page 8

Cleanliness

Titanium Apatite Photocatalytic Air-Purifying Filter

Uses a Titanium Apatite Photocatalytic Air-Purifying Filter. Titanium apatite is a photocatalytic material with high adsorption power. It effectively adsorbs and removes bacteria. It lasts for 3 years without replacement if washed about once every 6 months.

Photocatalytic Deodorising Filter

This filter removes bacteria and viruses. This power is maintained simply by exposing the filter to sunlight once every 6 months.

Air-Purifying Filter

The filter removes bacteria and viruses, and impurities such as dust, pollen and cigarette smoke from the air.

Wipe-Clean Flat Panel

The flat panel models can be cleaned with only the single pass of a cloth across their smooth surface. The flat panel can also be easily removed for more thorough cleaning.

► See pages 12 and 13

Filter Cleaning Indicator

Dust deposited on the air filters is not only unhygienic, it also reduces the operating efficiency of the air conditioner. A message indicates when the air filters need cleaning.

Timers

24-Hour On/Off Timer

This timer can be preset to start and stop at any time within a 24-hour period. The air conditioner is started/stopped simply by pressing the On/Off timer button on the wireless remote controller.

72-Hour On/Off Timer

This timer can be set to start and stop at any time within a 72-hour period. Simply press the On timer button, and the air conditioner will automatically start to operate at the preset time.

Weekly Timer

This timer can be preprogrammed with settings for day of the week, time of day, temperature, and operation on/off. A maximum of four air conditioner start or stop points can be entered per day for each of seven days in a one-week period simply by pressing the WEEKLY button.

► See pages 12 and 14

► Refer to page 20 to check the functions offered by individual models.

Night Set Mode

Pressing the Off timer button automatically selects the Night Set Mode. This function prevents excessive cooling or heating for pleasant sleep conditions.

Worry Free

Auto-Restart After Power Failure

The air conditioner memorises the settings for mode, airflow, temperature, etc., and automatically returns to them when power is restored after a power failure.

Self-Diagnosis with Digital Display

Malfunction codes for each indoor unit are shown on the digital display panel of the wireless remote controller for fast and easy maintenance.

Anticorrosion Treatment of Outdoor Heat Exchanger Fins

The outdoor unit's heat exchanger fins are processed using a special anticorrosion treatment. The surface is covered with a thin acrylic resin layer to enhance the fins' resistance to acid rain and salt corrosion.

Others

Comfort Control (available for heat pump type)

Quick Warming Function

During low outdoor temperatures, this function preheats the compressor to shorten the time required to discharge warm air.

Automatic Defrosting

Before starting heating operation, a sensor checks for frost in the outdoor unit and performs automatic defrosting if necessary so that only warm air is discharged.

Hot-Start Function

After defrosting or when starting heating operation, air is preheated before discharge to prevent uncomfortable cold drafts.

Worry Free

Cooling/Heating Mode Lock

The owner can lock the operation mode to prevent it from being changed in individual rooms. This is convenient in small hotels, and is available for heat pump type.

Wiring Error Check

Microcomputer checking and diagnosis of wiring errors during installation prevents problems.

Flexibility

Chargeless

Charging with additional refrigerant is not required even for long runs of piping. Available for cooling only type.

Either Side Drain (left or right)

The wall-mounted type indoor unit is designed so that drain piping can be connected to either the left or right side.

Specifications

Outdoor unit

Cooling only												
Model name	3MKS58LVMA	3MKS68LVMA	4MKS80LVMA	5MKS100LVMA								
Power supply	1 phase, 220-240 V/220-230 V, 50/60 Hz											
Max. connected indoor units capacity kW	10.0	11.0	15.6									
Casing colour	Ivory white											
Compressor type	Hermetically sealed swing type											
Refrigerant type	R-410A											
Sound level*	dB (A)	46/43	48/45	49/46								
Sound power level	dB (A)	59	61	62								
Dimensions (H x W x D)	mm	735 x 936 x 300	770 x 900 x 320	990 x 940 x 320								
Machine weight	kg	49	58	69	83							
Operation range	*CDB	10 to 46										
Max. piping length	m	50 (total) 25 (for one room)	60 (total) 20 (for 30m or more)	70 (total) 30 (for one room)	80 (total)							
Necessity of additional charge	g/m	Chargeless	20 (for 30m or more)	Chargeless	20 (for 40m or more)							
Max. installation height difference	m	15 (between indoor and outdoor units)/15 (between indoor units)	15 (between indoor and outdoor units)/7.5 (between indoor units)									

Heat pump

Model name	3MXS52LVMA	3MXS68LVMA	4MXS80LVMA	5MXS100LVMA				
Power supply	1 phase, 220-240 V/220-230 V, 50/60 Hz							
Max. connected indoor units capacity kW	9.0	11.0	14.5	15.6				
Casing colour	Ivory white							
Compressor type	Hermetically sealed swing type							
Refrigerant type	R-410A							
Sound level*	Cooling Heating	dB (A)	46/43 47/44	48/45 49/46	49/46			
Sound power level	Cooling Heating	dB (A)	59 60	61 62	62			
Dimensions (H x W x D)	mm	735 x 936 x 300	770 x 900 x 320	990 x 940 x 320				
Machine weight	kg	49	58	72	83			
Operation range	Cooling Heating	*CDB *CWB	-5 to 46 -15 to 15.5	-10 to 46		-15 to 18		
Max. piping length	m	50 (total) 25 (for one room)	60 (total) 20 (for 30m or more)	70 (total) 20 (for 40m or more)	80 (total)	30 (for one room)		
Necessity of additional charge	g/m	20 (for 30m or more)			20 (for 40m or more)			
Max. installation height difference	m	15 (between indoor and outdoor units)/7.5 (between indoor units)						

Note: * The first value, to the left of the slash, is the rated condition. The value to the right of the slash is the sound level when using outdoor unit quiet operation.

Indoor unit

Cooling only													
Model name	FTKS20KVMA	FTKS25KVMA	FTKS35KVMA	FTKS50KAVMA	FTKS60KAVMA	FTKS71KAVMA							
Power supply	1 phase, 220-240 V/220-230 V, 50/60 Hz												
Front panel colour	White												
Airflow rate (H) l/s (cfm)	161 (343)	188 (399)	245 (519)	270 (572)	290 (614)								
Sound level (H/L/SL) dB (A)	38/25/22	42/26/23	44/35/32	45/36/33	46/37/34								
Sound power level (H) dB (A)	54	58	60	61	62								
Fan speed	5 steps, quiet and automatic												
Temperature control	Microcomputer control												
Dimensions (H x W x D)	mm	295 x 800 x 215	290 x 1,050 x 250										
Machine weight	kg	9	10	12									
Piping connections	Liquid (flare) Gas (flare) Drain	mm	ø6.4 ø9.5 I.D. ø14.0/O.D. ø18.0										
Heat insulation	Both liquid and gas pipes												
Heat pump													
Model name	FTXS20KVMA	FTXS25KVMA	FTXS35KVMA	FTXS50KAVMA	FTXS60KAVMA	FTXS71KAVMA							
Power supply	1 phase, 220-240 V/220-230 V, 50/60 Hz												
Front panel colour	White												
Airflow rate (H) Cooling Heating l/s (cfm)	161 (343) 175 (371)	188 (399) 191 (406)	245 (519) 270 (572)	270 (572) 290 (614)	290 (614) 358 (759)								
Sound level (H/L/SL) dB (A)	38/25/22	42/26/23	44/35/32	45/36/33	46/37/34								
Sound power level (H) dB (A)	39/28/25	42/29/26	42/33/30	44/35/32	46/37/34								
Fan speed	5 steps, quiet and automatic												
Temperature control	Microcomputer control												
Dimensions (H x W x D)	mm	295 x 800 x 215	290 x 1,050 x 250										
Machine weight	kg	9	10	12									
Piping connections	Liquid (flare) Gas (flare) Drain	mm	ø6.4 ø9.5 I.D. ø14.0/O.D. ø18.0										
Heat insulation	Both liquid and gas pipes												

Indoor unit

Duct-connected type <700 mm width>

Model name	Cooling only		Heat pump			
Power supply			1 phase, 220-240 V/220-230 V, 50/60 Hz			
Airflow rate (H) Cooling Heating l/s (cfm)	145 (307)	—	145 (307)	145 (307)		
Sound level* (H/L/SL) dB(A)	35/31/29	—	35/31/29	35/31/29		
Sound power level (H) dB(A)	53	—	53	53		
Fan speed	5 steps, quiet and automatic					
Temperature control	Microcomputer control					
Dimensions (H x W x D)	mm	200 x 700 x 620				
Machine weight	kg	21				
Piping connections	Liquid (flare) Gas (flare) Drain	mm	ø6.4 ø9.5 VP20 (External Dia. 26/Internal Dia. 20)			
Heat insulation	Both liquid and gas pipes					
External static pressure	Pa	30				

Note: * The operation sound level values represent those for rear-suction operation and an external static pressure of 30 Pa for CDK(X)S-EA. Sound level values for bottom-suction operation can be obtained by adding 6 dB(A) to the CDK(X)S-EA values.

Duct-connected type <900/1,100 mm width>

Model name	Cooling only				Heat pump			
Power supply	CDKS25CVMA	CDKS35CVMA	CDKS50CVMA	CDKS60CVMA	FDXS25CVMA	FDXS35CVMA	FDXS50CVMA	FDXS60CVMA
Airflow rate (H) Cooling Heating l/s (cfm)	158 (335)	167 (353)	200 (424)	267 (565)	158 (335)	167 (353)	200 (424)	267 (565)
Sound level* (H/L/SL) dB(A)	35/31/29	—	—	—	158 (335)	167 (353)	200 (424)	267 (565)
Sound power level (H) dB(A)	53	55	56	53	53	55	55	56
Fan speed	5 steps, quiet and automatic							

Floor/ceiling-suspended dual type

Model name			FLXS25BVMA	FLXS35GVMA	FLXS50GVMA	FLXS60GVMA		
Power supply			1 phase, 220-240 V/220-230 V, 50/60 Hz					
Front grille colour			Almond white					
Airflow rate (H)	Cooling	ℓ/s	126 (268)	143 (304)	190 (402)	200 (424)		
	Heating	(cfm)	153 (325)	163 (346)	202 (427)	213 (452)		
Sound level (H/L/SL)	Cooling	dB (A)	37/31/28	38/32/29	47/39/36	48/41/39		
	Heating		37/31/29	39/33/30	46/35/33	47/37/34		
Sound power level (H)	Cooling	dB (A)	53	54	63	64		
	Heating		53	55	62	63		
Fan speed	5 steps, quiet and automatic							
Temperature control	Microcomputer control							
Dimensions (H x W x D)	mm		490 x 1,050 x 200					
Machine weight	kg		16					
Piping connections	Liquid (flare)	mm	ø6.4					
	Gas (flare)		ø9.5					
	Drain		ø18.0					
Heat insulation	Both liquid and gas pipes							

Compact multi flow ceiling-mounted cassette type

			Cooling only			Heat pump							
			FFQ25BV1B	FFQ35BV1B	FFQ50BV1B	FFQ60BV1B	FFQ25BV1B	FFQ35BV1B	FFQ50BV1B	FFQ60BV1B			
Power supply			1 phase, 220-240 V, 50 Hz										
Airflow rate (H)	Cooling	ℓ/s	150 (318)	167 (353)	200 (424)	250 (530)	150 (318)	167 (353)	200 (424)	250 (530)			
	Heating	(cfm)	—	—	—	—	150 (318)	167 (353)	200 (424)	250 (530)			
Sound level* (H/L)	Cooling	dB (A)	29.5/24.5	32/25	36/27	41/32	29.5/24.5	32/25	36/27	41/32			
	Heating		—	—	—	—	29.5/24.5	32/25	36/27	41/32			
Sound power level (H)	Cooling	dB (A)	46.5	49	53	58	46.5	49	53	58			
	Heating		—	—	—	—	46.5	49	53	58			
Fan speed	2 steps												
Temperature control	Microcomputer control												
Unit dimensions (H x W x D)	mm		286 x 575 x 575										
Machine weight	kg		17.5										
Piping connections	Liquid (flare)	mm	ø6.4										
	Gas (flare)		ø9.5										
	Drain		ø12.7										
Heat insulation	Both liquid and gas pipes												
Panel (option)	Model		BYFQ60B8W1										
	Colour		White										
	Dimensions (H x W x D)	mm	55 x 700 x 700										
	Weight	kg	2.7										

Note: * Anechoic chamber conversion value, measured according to JIS parameters and criteria. During operation these values are somewhat higher owing to ambient conditions.

Measurement conditions
 1. Cooling operation data is based on the following conditions: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; piping length 5 m.
 2. Heating operation data is based on the following conditions: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; piping length 5 m.
 3. Sound levels are anechoic conversion values. These values are normally somewhat higher during actual operation as a result of ambient conditions.

Options

Outdoor unit									
No.	Item	3MXS52L	3MKS58L	3MXS68L	3MKS68L	4MXS80L	4MKS80L	5MXS100L	5MKS100L
1	Air direction adjustment grille	KPW945A4						KPW5E112	

Notes: *1. One set includes 5 pieces for 5 units.
 *2. One set includes 1 piece for 1 unit.



Air direction adjustment grille
KPW945A4



Drain plug
KKP937A4

Indoor unit

No.	Item	Wall-mounted type	Duct-connected type			Floor-standing type	Floor/ceiling-suspended dual type
			CDK(X)S25/35EA	C(F)DK(X)S25-50C	C(F)DK(X)S60C		
1	Wired remote controller*1		BRC944B2				
2	Wired remote controller cord	Length 3 m (shielded wire) Length 8 m (shielded wire)	BRCW901A03 BRCW901A08				
3	5-room centralised controller*2		KRC72				
4	Wiring adaptor for time clock/remote controller*3 (Normal open pulse contact/normal open contact)		KRP413AB1S				
5	Titanium apatite photocatalytic air-purifying filter*4	KAF970A46				KAF968A42	
6	Photocatalytic deodorising filter with frame*5					KAZ917B41	
7	Photocatalytic deodorising filter without frame*5					KAZ917B42	
8	Air-purifying filter with frame*6					KAF925B41	
9	Air-purifying filter without frame*6					KAF925B42	
10	Wireless remote controller loss prevention chain	KKF910A4		KKF917A4		KKF910A4	KKF917A4
11	Suction grille			KDGF19A45			
12	Insulation kit for high humidity		KDT25N32	KDT25N50	KDT25N63		

Notes: *1. 3 m (BRCW901A03) or 8 m (BRCW901A08) length wired remote controller cord is necessary.

*2. A wiring adaptor (KRP413AB1S) is also required for each indoor unit.

*3. Time clock and other devices should be obtained locally.

*4. Filter is a standard accessory. It should be replaced approximately every 3 years.

*5. The photocatalytic deodorising filter is a standard accessory. It can be reused indefinitely if it is exposed to direct sunlight once every 6 months.

This accessory is only required if the original filter is damaged or lost, etc.

*6. The air-purifying filter is a standard accessory. It should be replaced approximately once every 3 months. This accessory is required for the replacement of filters.



Wired remote controller
BRC944B2



5-room centralised controller
KRC72



Titanium apatite photocatalytic air-purifying filter
KAF970A46



Remote controller loss prevention chain
KKF917A4

Compact multi flow ceiling-mounted cassette type									

<tbl_r cells="2" ix="

Cooling only

240 V, 50 Hz

Outdoor unit	Combinations of indoor units	Capacity of each indoor unit (kW)					Total capacity (kW) Rated (Min.-Max.)	Total power consumption (W) Rated (Min.-Max.)	Total current (A) Rated (Min.-Max.)
		A room	B room	C room	D room	E room			
3MKS58LVMA	20	2.00					2.00 (1.59-3.07)	440 (320- 770)	1.9 (1.4- 3.3)
	25	2.50					2.50 (1.59-3.30)	590 (320- 830)	2.5 (1.4- 3.5)
	35	3.50					3.50 (1.61-4.56)	950 (320-1,390)	4.0 (1.4- 5.9)
	50	5.00					5.00 (1.73-5.84)	1,520 (310-2,160)	6.4 (1.4- 9.1)
	20+20	2.00	2.00				4.00 (1.69-5.96)	990 (320-1,860)	4.2 (1.4- 7.9)
	20+25	2.00	2.50				4.50 (1.69-6.23)	1,210 (320-2,180)	5.1 (1.4- 9.2)
	20+35	1.95	3.40				5.35 (1.71-6.24)	1,620 (320-2,180)	6.8 (1.4- 9.2)
	20+50	1.60	4.00				5.60 (1.78-6.91)	1,540 (310-2,240)	6.5 (1.4- 9.5)
	25+25	2.60	2.60				5.20 (1.69-6.23)	1,580 (320-2,180)	6.6 (1.4- 9.2)
	25+35	2.27	3.18				5.45 (1.71-6.35)	1,690 (320-2,180)	7.1 (1.4- 9.2)
	25+50	1.88	3.77				5.65 (1.78-6.91)	1,580 (310-2,240)	6.6 (1.4- 9.5)
	35+35	2.80	2.80				5.60 (1.72-6.40)	1,760 (320-2,190)	7.4 (1.4- 9.3)
	35+50	2.39	3.41				5.80 (1.79-6.92)	1,620 (310-2,250)	6.8 (1.4- 9.5)
	50+50	2.90	2.90				5.80 (1.84-7.06)	1,500 (300-2,060)	6.3 (1.3- 8.7)
	20+20+20	1.93	1.93	1.93			5.80 (1.80-7.04)	1,590 (310-2,260)	6.7 (1.4- 9.6)
	20+20+25	1.78	1.78	2.24			5.80 (1.80-7.04)	1,590 (310-2,260)	6.7 (1.4- 9.6)
	20+20+35	1.55	1.55	2.70			5.80 (1.81-7.07)	1,560 (310-2,230)	6.6 (1.4- 9.4)
	20+20+50	1.29	1.29	3.22			5.80 (1.85-7.32)	1,510 (300-2,160)	6.4 (1.3- 9.1)
	20+25+25	1.66	2.07	2.07			5.80 (1.80-7.04)	1,590 (310-2,260)	6.7 (1.4- 9.6)
	20+25+35	1.45	1.81	2.54			5.80 (1.81-7.07)	1,560 (310-2,230)	6.6 (1.4- 9.4)
	20+25+50	1.22	1.53	3.05			5.80 (1.87-7.34)	1,510 (300-2,160)	6.4 (1.3- 9.1)
	20+35+35	1.28	2.26	2.26			5.80 (1.82-7.16)	1,560 (310-2,240)	6.6 (1.4- 9.5)
	25+25+25	1.93	1.93	1.93			5.80 (1.80-7.04)	1,590 (310-2,260)	6.7 (1.4- 9.6)
	25+25+35	1.71	1.71	2.38			5.80 (1.81-7.13)	1,560 (310-2,270)	6.6 (1.4- 9.6)
	25+25+50	1.45	1.45	2.90			5.80 (1.90-7.36)	1,510 (300-2,160)	6.4 (1.3- 9.1)
	25+35+35	1.52	2.14	2.14			5.80 (1.82-7.22)	1,560 (310-2,280)	6.6 (1.4- 9.6)
3MKS68LVMA	20	2.00					2.00 (1.95-3.00)	470 (440- 730)	2.0 (1.9- 3.1)
	25	2.50					2.50 (1.95-3.40)	600 (440- 880)	2.5 (1.9- 3.8)
	35	3.50					3.50 (1.95-4.75)	910 (460-1,500)	3.8 (2.0- 6.4)
	50	5.00					5.00 (1.96-5.89)	1,560 (430-2,100)	6.6 (1.9- 8.9)
	60	6.00					6.00 (1.96-6.52)	2,150 (430-2,570)	9.0 (1.9-10.9)
	20+20	2.00	2.00				4.00 (2.19-5.35)	980 (450-1,530)	4.1 (1.9- 6.5)
	20+25	2.00	2.50				4.50 (2.19-5.72)	1,190 (450-1,740)	5.0 (1.9- 7.4)
	20+35	2.00	3.50				5.50 (2.19-6.34)	1,610 (450-2,080)	6.8 (1.9- 8.8)
	20+50	1.94	4.86				6.80 (2.19-7.45)	2,260 (420-2,740)	9.5 (1.8-11.6)
	20+60	1.70	5.10				6.80 (2.19-7.69)	2,260 (420-2,890)	9.5 (1.8-12.2)
	25+25	2.50	2.50				5.00 (2.19-6.08)	1,420 (450-1,950)	6.0 (1.9- 8.3)
	25+35	2.50	3.50				6.00 (2.19-6.67)	1,910 (450-2,310)	8.0 (1.9- 9.8)
	25+50	2.27	4.53				6.80 (2.19-7.51)	2,260 (420-2,790)	9.5 (1.8-11.8)
	25+60	2.00	4.80				6.80 (2.19-7.69)	2,260 (420-2,890)	9.5 (1.8-12.2)
	35+35	3.40	3.40				6.80 (2.19-7.45)	2,410 (440-2,900)	10.1 (1.9-12.3)
	35+50	2.80	4.00				6.80 (2.19-7.70)	2,210 (420-2,890)	9.3 (1.8-12.2)
	35+60	2.51	4.29				6.80 (2.25-7.94)	2,210 (440-3,050)	9.3 (1.9-12.9)
	50+50	3.40	3.40				6.80 (2.36-8.13)	2,110 (450-3,050)	8.9 (1.9-12.9)
	50+60	3.09	3.71				6.80 (2.42-8.31)	2,060 (450-3,160)	8.7 (1.9-13.3)
	20+20+20	2.00	2.00	2.00			6.00 (2.20-7.43)	1,620 (380-2,390)	6.8 (1.6-10.1)
	20+20+25	2.00	2.00	2.50			6.50 (2.20-7.63)	1,880 (380-2,530)	7.9 (1.6-10.7)
	20+20+35	1.81	1.81	3.18			6.80 (2.20-7.84)	2,010 (380-2,630)	8.5 (1.6-11.1)
	20+20+50	1.51	1.51	3.78			6.80 (2.23-8.28)	1,870 (380-2,780)	7.9 (1.6-11.8)
	20+20+60	1.36	1.36	4.08			6.80 (2.36-8.41)	1,870 (410-2,830)	7.9 (1.8-12.0)
	20+25+25	1.94	2.43	2.43			6.80 (2.20-7.70)	2,020 (380-2,580)	8.5 (1.6-10.9)
	20+25+35	1.70	2.13	2.97			6.80 (2.20-7.97)	2,010 (380-2,730)	8.5 (1.6-11.5)
	20+25+50	1.43	1.79	3.58			6.80 (2.23-8.78)	1,870 (380-3,210)	7.9 (1.6-13.6)
	20+25+60	1.30	1.62	3.88			6.80 (2.36-8.85)	1,870 (410-3,210)	7.9 (1.8-13.6)
	20+35+35	1.52	2.64	2.64			6.80 (2.21-8.11)	1,970 (370-2,780)	8.3 (1.6-11.8)
	20+35+50	1.30	2.27	3.23			6.80 (2.36-8.86)	1,870 (410-3,210)	7.9 (1.8-13.6)
	25+25+25	2.27	2.27	2.27			6.80 (2.20-8.02)	2,020 (380-2,840)	8.5 (1.6-12.0)
	25+25+35	2.00	2.00	2.80			6.80 (2.20-8.16)	2,010 (380-2,890)	8.5 (1.6-12.2)
	25+25+50	1.70	1.70	3.40			6.80 (2.35-8.83)	1,870 (410-3,260)	7.9 (1.8-13.8)
	25+25+60	1.55	1.55	3.70			6.80 (2.42-9.00)	1,870 (410-3,380)	7.9 (1.8-14.3)
	25+35+35	1.78	2.51	2.51			6.80 (2.25-8.36)	1,970 (400-2,990)	8.3 (1.7-12.6)
	25+35+50	1.55	2.16	3.09			6.80 (2.42-8.92)	1,870 (410-3,260)	7.9 (1.8-13.8)
	35+35+35	2.27	2.27	2.27			6.80 (2.37-8.44)	1,920 (420-2,990)	8.1 (1.8-12.6)
4MKS80LVMA	20	2.00					2.		

240 V, 50 Hz

Outdoor unit	Combinations of indoor units	Capacity of each indoor unit (kW)					Total capacity (kW) Rated (Min.-Max.)	Total power consumption (W) Rated (Min.-Max.)	Total current A) Rated (Min.-Max.)
		A room	B room	C room	D room	E room			
4MKS80LVMA	20+20+35+60	1.19	1.19	2.07	3.55		8.00 (3.16- 9.66)	2,130 (650-3,510)	9.1 (2.8-15.0)
	20+20+35+71	1.10	1.10	1.92	3.88		8.00 (3.32- 9.68)	2,130 (680-3,510)	9.1 (2.9-15.0)
	20+20+50+50	1.14	1.14	2.86	2.86		8.00 (3.23- 9.75)	1,990 (640-3,560)	8.5 (2.8-15.2)
	20+20+50+60	1.07	1.07	2.67	3.20		8.00 (3.37- 9.80)	1,990 (670-3,630)	8.5 (2.9-15.5)
	20+25+25+25	1.67	2.11	2.11	2.11		8.00 (2.61- 9.10)	2,370 (550-3,340)	10.1 (2.4-14.3)
	20+25+25+35	1.52	1.90	1.90	2.68		8.00 (2.75- 9.15)	2,320 (590-3,350)	9.9 (2.6-14.3)
	20+25+25+50	1.33	1.67	1.67	3.33		8.00 (2.96- 9.56)	2,190 (620-3,510)	9.3 (2.7-15.0)
	20+25+25+60	1.23	1.54	1.54	3.69		8.00 (3.09- 9.61)	2,140 (610-3,510)	9.1 (2.6-15.0)
	20+25+25+71	1.13	1.42	1.42	4.03		8.00 (3.25- 9.68)	2,130 (690-3,510)	9.1 (3.0-15.0)
	20+25+35+35	1.40	1.74	2.43	2.43		8.00 (2.89- 9.33)	2,320 (620-3,490)	9.9 (2.7-14.9)
	20+25+35+50	1.23	1.54	2.15	3.08		8.00 (3.09- 9.61)	2,140 (650-3,510)	9.1 (2.8-15.0)
	20+25+35+60	1.14	1.43	2.00	3.43		8.00 (3.23- 9.66)	2,130 (650-3,510)	9.1 (2.8-15.0)
	20+25+35+71	1.06	1.32	1.85	3.76		8.00 (3.38- 9.80)	2,130 (680-3,650)	9.1 (2.9-15.6)
	20+25+50+50	1.10	1.38	2.76	2.76		8.00 (3.30- 9.80)	1,990 (640-3,640)	8.5 (2.8-15.5)
	20+25+50+60	1.03	1.29	2.58	3.10		8.00 (3.44- 9.80)	1,990 (670-3,630)	8.5 (2.9-15.5)
	20+35+35+35	1.28	2.24	2.24	2.24		8.00 (3.03- 9.37)	2,260 (660-3,500)	9.6 (2.9-14.9)
	20+35+35+50	1.14	2.00	2.00	2.86		8.00 (3.23- 9.63)	2,130 (650-3,510)	9.1 (2.8-15.0)
	20+35+35+60	1.07	1.87	1.87	3.20		8.00 (3.37- 9.80)	2,130 (680-3,580)	9.1 (2.9-15.3)
	20+35+50+50	1.03	1.81	2.58	2.58		8.00 (3.43- 9.83)	2,050 (710-3,560)	8.7 (3.1-15.2)
	25+25+25+25	2.00	2.00	2.00	2.00		8.00 (2.68- 9.10)	2,370 (550-3,340)	10.1 (2.4-14.3)
	25+25+25+35	1.82	1.82	1.82	2.54		8.00 (2.82- 9.15)	2,320 (590-3,350)	9.9 (2.6-14.3)
	25+25+25+50	1.60	1.60	1.60	3.20		8.00 (3.03- 9.56)	2,190 (620-3,510)	9.3 (2.7-15.0)
	25+25+25+60	1.48	1.48	1.48	3.56		8.00 (3.16- 9.65)	2,140 (650-3,510)	9.1 (2.8-15.0)
	25+25+25+71	1.37	1.37	1.37	3.89		8.00 (3.16- 9.68)	2,130 (650-3,510)	9.1 (2.8-15.0)
	25+25+35+35	1.67	1.67	2.33	2.33		8.00 (2.96- 9.33)	2,320 (620-3,490)	9.9 (2.7-14.9)
	25+25+35+50	1.48	1.48	2.07	2.97		8.00 (3.16- 9.63)	2,140 (650-3,510)	9.1 (2.8-15.0)
	25+25+35+60	1.38	1.38	1.93	3.31		8.00 (3.30- 9.67)	2,130 (690-3,510)	9.1 (3.0-15.0)
	25+25+35+71	1.28	1.28	1.79	3.64		8.00 (3.45- 9.80)	2,130 (720-3,650)	9.1 (3.1-15.6)
	25+25+50+50	1.33	1.33	2.67	2.67		8.00 (3.37- 9.83)	2,060 (670-3,640)	8.8 (2.9-15.5)
	25+35+35+35	1.55	2.15	2.15	2.15		8.00 (3.09- 9.37)	2,260 (660-3,500)	9.6 (2.9-14.9)
	25+35+35+50	1.38	1.93	1.93	2.76		8.00 (3.30- 9.63)	2,130 (690-3,510)	9.1 (3.0-15.0)
	25+35+35+60	1.29	1.81	1.81	3.10		8.00 (3.44- 9.80)	2,130 (720-3,580)	9.1 (3.1-15.3)
	35+35+35+35	2.00	2.00	2.00	2.00		8.00 (3.23- 9.42)	2,260 (690-3,500)	9.6 (3.0-14.9)
	35+35+35+50	1.81	1.81	1.81	2.58		8.00 (3.43- 9.80)	2,140 (720-3,580)	9.1 (3.1-15.3)
5MKS100LVMA	20	2.00					2.00 (2.04- 3.52)	440 (430- 800)	1.9 (1.9- 3.5)
	25	2.50					2.50 (2.04- 3.63)	550 (430- 840)	2.4 (1.9- 3.7)
	35	3.50					3.50 (2.07- 3.88)	800 (430- 940)	3.4 (1.9- 4.1)
	50	5.00					5.00 (2.39- 6.01)	1,190 (460- 1,690)	5.1 (2.0- 7.3)
	60	6.00					6.00 (2.42- 7.12)	1,640 (460- 2,560)	7.0 (2.0-11.0)
	71	7.10					7.10 (2.44- 7.57)	2,430 (460- 2,960)	10.4 (2.0-12.8)
	20+20	2.00	2.00				4.00 (2.76- 5.66)	810 (470- 1,350)	3.5 (2.1- 5.8)
	20+25	2.00	2.50				4.50 (2.76- 5.97)	980 (470- 1,490)	4.2 (2.1- 6.5)
	20+35	2.00	3.50				5.50 (2.78- 6.40)	1,350 (470- 1,650)	5.8 (2.1- 7.1)
	20+50	2.00	5.00				7.00 (2.96- 8.71)	1,850 (480- 2,870)	7.9 (2.1-12.4)
	20+60	1.91	5.72				7.63 (2.98- 9.64)	2,140 (480- 3,520)	9.2 (2.1-15.2)
	20+71	1.82	6.46				8.28 (3.00-10.08)	2,510 (480- 3,960)	10.8 (2.1-17.1)
	25+25	2.50	2.50				5.00 (2.76- 6.27)	1,160 (470- 1,650)	5.0 (2.1- 7.1)
	25+35	2.50	3.50				6.00 (2.78- 7.46)	1,550 (470- 2,490)	6.7 (2.1-10.7)
	25+50	2.44	4.89				7.33 (2.96- 9.48)	2,020 (480- 3,520)	8.7 (2.1-15.2)
	25+60	2.33	5.59				7.92 (2.98- 9.64)	2,320 (480- 3,520)	10.0 (2.1-15.2)
	25+71	2.23	6.34				8.57 (3.00-10.08)	2,700 (480- 3,960)	11.6 (2.1-17.1)
	35+35	3.50	3.50				7.00 (2.81- 7.98)	2,140 (470- 2,880)	9.2 (2.1-12.4)
	35+50	3.26	4.66				7.92 (2.98- 9.63)	2,320 (480- 3,520)	10.0 (2.1-15.2)
	35+60	3.14	5.38				8.52 (3.01-10.11)	2,700 (480- 3,960)	11.6 (2.1-17.1)
	35+71	3.03	6.14				9.17 (3.02-10.24)	3,110 (480- 3,960)	13.4 (2.1-17.1)
	50+50	4.41	4.41				8.81 (3.12-10.88)	2,500 (480- 3,950)	10.7 (2.1-17.0)
	50+60	4.27	5.13				9.40 (3.14-11.02)	2,830 (480- 3,940)	12.2 (2.1-17.0)
	50+71	4.13	5.87				10.00 (3.15-11.11)	3,240 (480- 3,940)	13.9 (2.1-17.0)
	60+60	5.00	5.00				10.00 (3.15-11.15)	3,240 (480- 3,940)	13.9 (2.1-17.0)
	60+71	4.58	5.42				10.00 (3.17-11.24)	3,170 (480- 3,940)	1

240 V, 50 Hz

Outdoor unit	Combinations of indoor units	Capacity of each indoor unit (kW)					Total capacity (kW) Rated (Min.-Max.)	Total power consumption (W) Rated (Min.-Max.)	Total current (A) Rated (Min.-Max.)
		A room	B room	C room	D room	E room			
5MKS100LVMA	25+35+35+35	1.93	2.69	2.69	2.69		10.00 (3.24-11.96)	2,880 (480-3,920)	12.4 (2.1-16.9)
	25+35+35+50	1.72	2.41	2.41	3.46		10.00 (3.30-12.48)	2,740 (480-3,980)	11.8 (2.1-17.1)
	25+35+35+60	1.61	2.26	2.26	3.87		10.00 (3.31-12.53)	2,670 (480-3,970)	11.5 (2.1-17.1)
	35+35+35+35	2.50	2.50	2.50	2.50		10.00 (3.25-12.04)	2,880 (480-3,920)	12.4 (2.1-16.9)
	35+35+35+50	2.26	2.26	2.26	3.22		10.00 (3.31-12.53)	2,670 (480-3,980)	11.5 (2.1-17.1)
	20+20+20+20+20	2.00	2.00	2.00	2.00	2.00	10.00 (3.30-12.50)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+20+20+25	1.90	1.90	1.90	2.40		10.00 (3.30-12.50)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+20+20+35	1.74	1.74	1.74	3.04		10.00 (3.31-12.55)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+20+20+20+50	1.54	1.54	1.54	3.84		10.00 (3.34-12.71)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+20+20+20+60	1.43	1.43	1.43	4.28		10.00 (3.34-12.71)	2,600 (480-3,950)	11.2 (2.1-17.0)
	20+20+20+20+71	1.32	1.32	1.32	4.72		10.00 (3.34-12.71)	2,600 (480-3,940)	11.2 (2.1-17.0)
	20+20+20+25+25	1.82	1.82	1.82	2.27	2.27	10.00 (3.30-12.50)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+20+25+35	1.67	1.67	1.67	2.08	2.91	10.00 (3.31-12.55)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+20+20+25+50	1.48	1.48	1.48	1.85	3.71	10.00 (3.34-12.71)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+20+20+25+60	1.38	1.38	1.38	4.14		10.00 (3.34-12.71)	2,600 (480-3,950)	11.2 (2.1-17.0)
	20+20+20+25+71	1.28	1.28	1.28	4.56		10.00 (3.34-12.71)	2,600 (480-3,940)	11.2 (2.1-17.0)
	20+20+20+35+35	1.54	1.54	1.54	2.69	2.69	10.00 (3.32-12.59)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+20+20+35+50	1.38	1.38	1.38	3.45		10.00 (3.34-12.71)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+20+20+35+60	1.29	1.29	1.29	2.26	3.87	10.00 (3.34-12.71)	2,600 (480-3,950)	11.2 (2.1-17.0)
	20+20+25+25+25	1.74	1.74	2.17	2.17	2.17	10.00 (3.30-12.50)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+25+25+35	1.60	1.60	2.00	2.00	2.80	10.00 (3.31-12.55)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+20+25+25+50	1.43	1.43	1.79	1.79	3.56	10.00 (3.34-12.71)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+20+25+25+60	1.33	1.33	1.67	1.67	4.00	10.00 (3.34-12.71)	2,600 (480-3,950)	11.2 (2.1-17.0)
	20+20+25+35+35	1.48	1.48	1.86	2.59	2.59	10.00 (3.32-12.59)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+20+25+35+50	1.33	1.33	1.68	2.33	3.33	10.00 (3.34-12.71)	2,600 (480-3,950)	11.2 (2.1-17.0)
	20+20+35+35+35	1.38	1.38	2.41	2.41	10.00 (3.32-12.62)	2,670 (480-3,970)	11.5 (2.1-17.1)	
	20+25+25+25+25	1.68	2.08	2.08	2.08	10.00 (3.30-12.50)	2,740 (480-3,980)	11.8 (2.1-17.1)	
	20+25+25+25+35	1.54	1.92	1.92	2.70	2.70	10.00 (3.31-12.55)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+25+25+25+50	1.38	1.72	1.72	1.72	3.46	10.00 (3.34-12.71)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+25+25+25+60	1.29	1.61	1.61	1.61	3.88	10.00 (3.34-12.71)	2,600 (480-3,950)	11.2 (2.1-17.0)
	20+25+25+35+35	1.42	1.79	1.79	2.50	2.50	10.00 (3.32-12.59)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+25+25+35+50	1.29	1.61	1.61	2.26	3.23	10.00 (3.34-12.71)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+25+35+35+35	1.33	1.67	2.33	2.33	2.33	10.00 (3.32-12.62)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+25+35+35+50	1.33	1.67	2.33	2.33	2.33	10.00 (3.32-12.62)	2,670 (480-3,970)	11.5 (2.1-17.1)
	25+25+25+25+25	2.00	2.00	2.00	2.00	2.00	10.00 (3.30-12.50)	2,740 (480-3,980)	11.8 (2.1-17.1)
	25+25+25+25+35	1.85	1.85	1.85	2.60	10.00 (3.31-12.55)	2,670 (480-3,970)	11.5 (2.1-17.1)	
	25+25+25+25+50	1.67	1.67	1.67	3.32	10.00 (3.34-12.71)	2,600 (480-3,960)	11.2 (2.1-17.1)	
	25+25+25+35+35	1.72	1.72	1.72	2.42	2.42	10.00 (3.32-12.59)	2,670 (480-3,970)	11.5 (2.1-17.1)
	25+25+35+35+35	1.61	1.61	2.26	2.26	2.26	10.00 (3.32-12.62)	2,670 (480-3,970)	11.5 (2.1-17.1)

Notes: 1. Cooling operation data is based on the following conditions: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; corresponding refrigerant piping length 5m; level difference 0m.

2. Total capacity of connected indoor units is: up to 10.0 kW to the 3MKS58; up to 11.0 kW to the 3MKS68; up to the 15.6 kW to the 4MKS80 and the 5MKS100.

3. The above is the value for connecting with the following indoor units: 2.0/2.5/3.5/5.0/6.0/7.1 kW class, wall-mounted K/KA series.

Heat pump

Outdoor unit	Combinations of indoor units	Capacity of each indoor unit (kW)					Total capacity (kW) Rated (Min.-Max.)	Total power consumption (W) Rated (Min.-Max.)	Total current (A) Rated (Min.-Max.)
		A room	B room	C room	D room	E room			
3MXS52LVMA	20	2.00					2.00 (1.63-2.95)	440 (320- 730)	1.9 (1.4- 3.1)
	25	2.50					2.50 (1.63-3.24)	590 (320- 820)	2.5 (1.4- 3.5)
	35	3.50					3.50 (1.65-4.52)	950 (320-1,380)	4.0 (1.4- 5.9)
	50	5.00					5.00 (1.77-5.84)	1,520 (310-2,160)	6.4 (1.4- 9.1)
	20+20	2.00	2.00				4.00 (1.80-5.96)	980 (310-1,860)	4.1 (1.4- 7.9)
	20+25	2.00	2.50				4.50 (1.80-6.23)	1,180 (310-2,180)	5.0 (1.4- 9.2)
	20+35	1.89	3.31				5.20 (1.82-6.24)	1,510 (310-2,180)	6.4 (1.4- 9.2)
	20+50	1.49	3.71				5.20 (1.90-6.91)	1,340 (300-2,240)	5.6 (1.3- 9.5)
	25+25	2.60	2.60				5.20 (1.80-6.23)	1,540 (310-2,180)	6.5 (1.4- 9.2)
	25+35	2.17	3						

240 V, 50 Hz

240 V, 50 Hz

Outdoor unit	Combinations of indoor units	Capacity of each indoor unit (kW)					Total capacity (kW) Rated (Min.-Max.)	Total power consumption (W) Rated (Min.-Max.)	Total current (A) Rated (Min.-Max.)
		A room	B room	C room	D room	E room			
3MXS68LVMA	20+35+50	1.30	2.27	3.23			6.80 (2.36- 8.86)	1,870 (410-3,210)	7.9 (1.8-13.6)
	25+25+25	2.27	2.27	2.27			6.80 (2.20- 8.02)	2,020 (380-2,840)	8.5 (1.6-12.0)
	25+25+35	2.00	2.00	2.80			6.80 (2.20- 8.16)	2,010 (380-2,890)	8.5 (1.6-12.2)
	25+25+50	1.70	1.70	3.40			6.80 (2.35- 8.83)	1,870 (410-3,260)	7.9 (1.8-13.8)
	25+25+60	1.55	1.55	3.70			6.80 (2.42- 9.00)	1,870 (410-3,380)	7.9 (1.8-14.3)
	25+35+35	1.78	2.51	2.51			6.80 (2.25- 8.36)	1,970 (400-2,990)	8.3 (1.7-12.6)
	25+35+50	1.55	2.16	3.09			6.80 (2.42- 8.92)	1,870 (410-3,260)	7.9 (1.8-13.8)
	35+35+35	2.27	2.27	2.27			6.80 (2.37- 8.44)	1,920 (420-2,990)	8.1 (1.8-12.6)
	20	2.72					2.72 (1.35- 3.90)	640 (290-1,050)	2.7 (1.3- 4.5)
	25	3.40					3.40 (1.35- 4.17)	870 (290-1,160)	3.7 (1.3- 4.9)
3MXS68LVMA	35	4.30					4.30 (1.35- 4.53)	1,220 (290-1,300)	5.1 (1.3- 5.5)
	50	7.20					7.20 (1.61- 8.07)	2,440 (370-2,960)	10.3 (1.6-12.5)
	60	7.90					7.90 (1.93- 8.54)	2,830 (470-3,220)	11.9 (2.0-13.6)
	20+20	3.25	3.25				6.50 (1.61- 7.67)	1,820 (360-2,380)	7.7 (1.6-10.1)
	20+25	3.04	3.81				6.85 (1.61- 7.82)	1,980 (360-2,460)	8.3 (1.6-10.4)
	20+35	2.71	4.74				7.45 (1.75- 8.47)	2,240 (390-2,790)	9.4 (1.7-11.8)
	20+50	2.40	6.00				8.40 (2.15-10.12)	2,680 (460-3,400)	11.3 (2.0-14.4)
	20+60	2.10	6.30				8.40 (2.43-10.32)	2,660 (550-3,420)	11.2 (2.4-14.4)
	25+25	3.60	3.60				7.20 (1.61- 8.21)	2,330 (360-2,680)	9.8 (1.6-11.3)
	25+35	3.29	4.61				7.90 (1.90- 8.92)	2,680 (430-3,060)	11.3 (1.9-12.9)
	25+50	2.80	5.60				8.40 (2.26-10.23)	2,680 (510-3,440)	11.3 (2.2-14.5)
	25+60	2.47	5.93				8.40 (2.53-10.40)	2,660 (580-3,450)	11.2 (2.5-14.6)
	35+35	4.20	4.20				8.40 (2.13- 9.10)	2,950 (500-3,250)	12.4 (2.2-13.7)
	35+50	3.46	4.94				8.40 (2.50-10.41)	2,660 (580-3,450)	11.2 (2.5-14.6)
	35+60	3.09	5.31				8.40 (2.73-10.56)	2,630 (620-3,460)	11.1 (2.7-14.6)
	50+50	4.30	4.30				8.60 (2.83-10.61)	2,510 (590-3,240)	10.6 (2.5-13.7)
	50+60	3.91	4.69				8.60 (3.04-10.64)	2,450 (660-3,210)	10.3 (2.8-13.6)
	20+20+20	2.63	2.63	2.63			7.89 (1.89-10.08)	2,150 (350-3,070)	9.0 (1.5-13.0)
	20+20+25	2.54	2.54	3.17			8.25 (2.02-10.15)	2,330 (390-3,120)	9.8 (1.7-13.2)
	20+20+35	2.54	2.24	3.92			8.40 (2.27-10.20)	2,390 (450-3,090)	10.1 (1.9-13.1)
	20+20+50	1.91	1.91	4.78			8.60 (2.67-10.47)	2,120 (510-2,930)	8.9 (2.2-12.4)
	20+20+60	1.72	1.72	5.16			8.60 (2.81-10.60)	2,100 (550-2,930)	8.8 (2.4-12.4)
	20+25+25	2.40	3.00	3.00			8.40 (2.15-10.10)	2,410 (410-3,100)	10.1 (1.8-13.1)
	20+25+35	2.10	2.63	3.67			8.40 (2.36-10.20)	2,390 (470-3,090)	10.1 (2.0-13.1)
	20+25+50	1.81	2.26	4.53			8.60 (2.70-10.61)	2,120 (530-2,970)	8.9 (2.3-12.5)
	20+25+60	1.64	2.05	4.91			8.60 (2.93-10.64)	2,100 (570-2,940)	8.8 (2.4-12.4)
	20+35+35	1.86	3.27	3.27			8.40 (2.68-10.41)	2,330 (530-3,120)	9.8 (2.3-13.2)
	20+35+50	1.64	2.87	4.09			8.60 (3.02-10.64)	2,100 (600-2,940)	8.8 (2.6-12.4)
	25+25+25	2.80	2.80				8.40 (2.26-10.23)	2,410 (450-3,140)	10.1 (1.9-13.3)
	25+25+35	2.47	2.47	3.46			8.40 (2.50-10.41)	2,390 (490-3,160)	10.1 (2.1-13.3)
	25+25+50	2.15	2.15	4.30			8.60 (2.83-10.61)	2,120 (560-2,970)	8.9 (2.4-12.5)
	25+25+60	1.95	1.95	4.70			8.60 (3.04-10.65)	2,100 (620-2,950)	8.8 (2.7-12.5)
	25+35+35	2.22	3.09	3.09			8.40 (2.73-10.57)	2,330 (560-3,170)	9.8 (2.4-13.4)
	25+35+50	1.95	2.74	3.91			8.60 (3.04-10.64)	2,100 (620-2,940)	8.8 (2.7-12.4)
	35+35+35	2.80	2.80	2.80			8.40 (3.01-10.62)	2,310 (620-3,140)	9.7 (2.7-13.3)
4MXS80LVMA	20	2.00					2.00 (1.80- 3.27)	490 (450- 820)	2.1 (2.0- 3.5)
	25	2.50					2.50 (1.87- 3.52)	620 (480- 890)	2.6 (2.1- 3.8)
	35	3.50					3.50 (1.91- 4.85)	900 (480- 1,340)	3.8 (2.1- 5.7)
	50	5.00					5.00 (2.07- 5.94)	1,350 (500- 1,770)	5.7 (2.2- 7.6)
	60	6.00					6.00 (2.17- 7.07)	1,780 (530- 2,440)	7.6 (2.3-10.4)
	71	7.10					7.10 (2.28- 7.52)	2,450 (540- 2,780)	10.4 (2.3-11.9)
	20+20	2.00	2.00				4.00 (2.30- 5.58)	960 (540- 1,460)	4.1 (2.3- 6.3)
	20+25	2.00	2.50				4.50 (2.30- 5.80)	1,120 (540- 1,560)	4.8 (2.3- 6.7)
	20+35	2.00	3.50				5.50 (2.33- 6.38)	1,470 (540- 1,800)	6.3 (2.3- 7.7)
	20+50	2.00	5.00				7.00 (2.27- 7.91)	2,070 (510- 2,940)	8.8 (2.2-12.5)
	20+60	1.83	5.47				7.30 (2.41- 8.11)	2,240 (550- 3,080)	9.5 (2.4-13.1)
	20+71	1.66	5.90				7.56 (2.56- 8.28)	2,360 (580- 3,220)	10.0 (2.5-13.7)
	25+25	2.50	2.50				5.00 (2.30- 6.31)	1,290 (540- 1,790)	5.5 (2.3- 7.7)
	25+35	2.50	3.50				6.00 (2.33- 7.14)	1,700 (540- 2,480)	7.2 (2.3-10.6)
	25+50	2.40	4.79				7.19 (2.34- 8.03)	2,170 (510- 3,060)	9.2 (2.2-13.1)
	25+60	2.18	5.24				7.42 (2.48- 8.11)	2,290 (550- 3,080)	9.7 (2.4-13.1)
	25+71	2.00	5.67				7.67 (2.63- 8.28)	2,410 (580- 3,220)	10.2 (2.5-13.7)
	35+35	3.50	3.50				7.00 (2.27- 7.62)	2,210 (540- 2,840)	9.4 (2.3

240 V, 50 Hz

Outdoor unit	Combinations of indoor units	Capacity of each indoor unit (kW)					Total capacity (kW) Rated (Min.-Max.)	Total power consumption (W) Rated (Min.-Max.)	Total current (A) Rated (Min.-Max.)
		A room	B room	C room	D room	E room			
4MXS80LVMA	20	2.44					2.44 (2.19- 4.47)	600 (510-1,110)	2.6 (2.2- 4.8)
	25	3.05					3.05 (2.19- 4.75)	750 (510-1,190)	3.2 (2.2- 5.1)
	35	4.27					4.27 (2.19- 5.44)	1,050 (510-1,370)	4.5 (2.2- 5.9)
	50	6.09					6.09 (2.18- 8.11)	1,540 (490-2,220)	6.5 (2.1- 9.5)
	60	7.31					7.31 (2.18- 8.58)	1,950 (480-2,380)	8.3 (2.1-10.2)
	71	8.65					8.65 (2.50- 8.81)	2,390 (560-2,430)	10.2 (2.4-10.4)
	20+20	2.44	2.44				4.88 (2.39- 7.78)	1,130 (530-2,050)	4.8 (2.3- 8.8)
	20+25	2.44	3.05				5.49 (2.39- 8.03)	1,330 (530-2,140)	5.7 (2.3- 9.1)
	20+35	2.44	4.26				6.70 (2.39- 8.27)	1,680 (520-2,210)	7.1 (2.3- 9.4)
	20+50	2.44	6.09				8.53 (2.47- 9.72)	2,300 (530-2,720)	9.8 (2.3-11.6)
	20+60	2.32	6.95				9.27 (2.74-10.06)	2,570 (600-2,940)	10.9 (2.6-12.5)
	20+71	2.11	7.49				9.60 (3.04-10.17)	2,680 (650-2,990)	11.4 (2.8-12.8)
	25+25	3.05	3.05				6.09 (2.39- 8.27)	1,490 (530-2,230)	6.3 (2.3- 9.5)
	25+35	3.05	4.26				7.31 (2.39- 8.62)	1,900 (520-2,350)	8.1 (2.3-10.0)
	25+50	2.98	5.95				8.93 (2.61- 9.78)	2,440 (570-2,910)	10.4 (2.5-12.4)
	25+60	2.83	6.79				9.62 (2.88-10.11)	2,720 (630-2,980)	11.6 (2.7-12.7)
	25+71	2.50	7.10				9.60 (3.17-10.22)	2,680 (680-3,030)	11.4 (2.9-12.9)
	35+35	4.27	4.27				8.53 (2.47- 8.97)	2,330 (550-2,600)	9.9 (2.4-11.1)
	35+50	3.96	5.66				9.62 (2.88- 9.84)	2,710 (630-2,940)	11.5 (2.7-12.5)
	35+60	3.54	6.06				9.60 (3.15-10.17)	2,700 (690-3,010)	11.5 (3.0-12.8)
	35+71	3.17	6.43				9.60 (3.45-10.26)	2,660 (740-3,060)	11.3 (3.2-13.1)
	50+50	4.80	4.80				9.60 (3.28-10.35)	2,670 (670-3,140)	11.4 (2.9-13.4)
	50+60	4.36	5.24				9.60 (3.55-10.35)	2,660 (740-3,130)	11.3 (3.2-13.4)
	50+71	3.97	5.63				9.60 (3.85-10.36)	2,620 (780-3,100)	11.1 (3.4-13.2)
	60+60	4.80	4.80				9.60 (3.82-10.36)	2,640 (800-3,120)	11.2 (3.5-13.3)
	60+71	4.40	5.20				9.60 (4.12-10.38)	2,610 (840-3,100)	11.1 (3.6-13.2)
	71+71	4.80	4.80				9.60 (4.42-10.41)	2,570 (880-3,070)	10.9 (3.8-13.1)
	20+20+20	2.43	2.43	2.43			7.29 (2.38- 8.66)	1,750 (450-2,190)	7.4 (2.0- 9.4)
	20+20+25	2.44	2.44	3.04			7.92 (2.38- 9.08)	1,970 (450-2,270)	8.4 (2.0- 9.7)
	20+20+35	2.38	2.38	4.17			8.93 (2.61- 9.78)	2,320 (500-2,650)	9.9 (2.2-11.3)
	20+20+50	2.13	2.13	5.34			9.60 (3.01-10.36)	2,570 (570-3,070)	10.9 (2.5-13.1)
	20+20+60	1.92	1.92	5.76			9.60 (3.28-10.36)	2,560 (630-3,060)	10.9 (2.7-13.1)
	20+20+71	1.73	1.73	6.14			9.60 (3.58-10.39)	2,520 (670-3,030)	10.7 (2.9-12.9)
	20+25+25	2.43	3.05	3.05			8.53 (2.47- 9.16)	2,200 (480-2,440)	9.4 (2.1-10.4)
	20+25+35	2.32	2.90	4.05			9.27 (2.74- 9.84)	2,460 (540-2,840)	10.5 (2.3-12.1)
	20+25+50	2.02	2.53	5.05			9.60 (3.15-10.36)	2,570 (610-3,070)	10.9 (2.6-13.1)
	20+25+60	1.83	2.29	5.48			9.60 (3.42-10.36)	2,560 (660-3,060)	10.9 (2.9-13.1)
	20+25+71	1.66	2.07	5.87			9.60 (3.72-10.39)	2,520 (700-3,030)	10.7 (3.0-12.9)
	20+35+35	2.14	3.73	3.73			9.60 (3.01-10.07)	2,590 (590-2,840)	11.0 (2.6-12.1)
	20+35+50	1.83	3.20	4.57			9.60 (3.42-10.36)	2,550 (660-3,050)	10.8 (2.9-13.0)
	20+35+60	1.67	2.92	5.01			9.60 (3.69-10.36)	2,540 (690-3,050)	10.8 (3.0-13.0)
	20+35+71	1.52	2.67	5.41			9.60 (3.99-10.39)	2,500 (760-3,020)	10.6 (3.3-12.9)
	20+50+50	1.60	4.00	4.00			9.60 (3.82-10.67)	2,510 (700-3,020)	10.7 (3.0-12.9)
	20+50+60	1.48	3.69	4.43			9.60 (4.09-10.67)	2,500 (750-3,010)	10.6 (3.2-12.8)
	20+50+71	1.36	3.40	4.84			9.60 (4.39-10.71)	2,460 (790-2,990)	10.5 (3.4-12.8)
	20+60+60	1.38	4.11	4.11			9.60 (4.36-10.71)	2,480 (810-3,000)	10.5 (3.5-12.8)
	25+25+25	2.98	2.98	2.98			8.93 (2.61- 9.38)	2,340 (510-2,560)	9.9 (2.2-10.9)
	25+25+35	2.83	2.83	3.96			9.62 (2.88- 9.84)	2,610 (570-2,840)	11.1 (2.5-12.1)
	25+25+50	2.40	2.40	4.80			9.60 (3.28-10.36)	2,570 (640-3,070)	10.9 (2.8-13.1)
	25+25+60	2.18	2.18	5.24			9.60 (3.55-10.36)	2,560 (660-3,060)	10.9 (2.9-13.1)
	25+25+71	1.98	1.98	5.64			9.60 (3.85-10.39)	2,520 (740-3,030)	10.7 (3.2-12.9)
	25+35+35	2.52	3.54	3.54			9.60 (3.15-10.12)	2,590 (620-2,880)	11.0 (2.7-12.3)
	25+35+50	2.18	3.05	4.37			9.60 (3.55-10.36)	2,550 (660-3,050)	10.8 (2.9-13.0)
	25+35+60	2.00	2.80	4.80			9.60 (3.82-10.36)	2,540 (720-3,050)	10.8 (3.1-13.0)
	25+35+71	1.83	2.56	5.21			9.60 (4.12-10.39)	2,500 (760-3,020)	10.6 (3.3-12.9)
	25+50+50	1.92	3.84	3.84			9.60 (3.96-10.65)	2,510 (730-3,020)	10.7 (3.2-12.9)
	25+50+60	1.78	3.56	4.26			9.60 (4.23-10.67)	2,500 (790-3,010)	10.6 (3.4-12.8)
	25+60+60	1.66	3.97	3.97			9.60 (4.50-10.71)	2,480 (850-3,000)	10.5 (3.7-12.8)
	35+35+35	3.20	3.20	3.20			9.60 (3.42-10.12)	2,580 (680-2,870)	11.0 (2.9-12.3)
	35+35+50	2.80	2.80	4.00			9.60 (3.82-10.36)	2,530 (720-3,040)	10.8 (3.1-13.0)
	35+35+60	2.58	2.58	4.44			9.60 (4.09-10.37)	2,520 (770-3,030)	10.7 (3.3-12.9)
	35+35+71	2.38	2.38	4.84			9.60 (4.39-10.40)	2,480 (810-3,000)	10.5 (3.5-12.8)
	35+50+50								

240 V, 50 Hz

240 V, 50 Hz

Outdoor unit	Combinations of indoor units	Capacity of each indoor unit (kW)					Total capacity (kW) Rated (Min.-Max.)	Total power consumption (W) Rated (Min.-Max.)	Total current (A) Rated (Min.-Max.)
		A room	B room	C room	D room	E room			
5MXS100LVMA	20+60+71	1.32	3.97	4.71			10.00 (3.29-12.40)	2,740 (480-3,980)	11.8 (2.1-17.1)
	25+25+25	2.46	2.46	2.46			7.39 (3.01-10.03)	1,960 (480-3,520)	8.4 (2.1-15.2)
	25+25+35	2.39	2.39	3.35			8.14 (3.03-10.17)	2,320 (480-3,510)	10.0 (2.1-15.1)
	25+25+50	2.31	2.31	4.63			9.25 (3.16-11.40)	2,690 (480-3,940)	11.6 (2.1-17.0)
	25+25+60	2.27	2.27	5.46			9.99 (3.18-11.53)	3,160 (480-3,940)	13.6 (2.1-17.0)
	25+25+71	2.07	2.07	5.86			10.00 (3.19-11.61)	3,090 (480-3,930)	13.3 (2.1-16.9)
	25+35+35	2.33	3.27	3.27			8.88 (3.06-10.37)	2,770 (480-3,580)	11.9 (2.1-15.4)
	25+35+50	2.27	3.18	4.54			9.99 (3.17-11.52)	3,160 (480-3,940)	13.6 (2.1-17.0)
	25+35+60	2.08	2.92	5.00			10.00 (3.19-11.64)	3,090 (480-3,930)	13.3 (2.1-16.9)
	25+35+71	1.91	2.67	5.42			10.00 (3.20-11.72)	3,020 (480-3,930)	13.0 (2.1-16.9)
	25+50+50	2.00	4.00	4.00			10.00 (3.26-12.20)	2,810 (480-3,990)	12.1 (2.1-17.2)
	25+50+60	1.85	3.70	4.45			10.00 (3.27-12.28)	2,810 (480-3,990)	12.1 (2.1-17.2)
	25+50+71	1.71	3.42	4.87			10.00 (3.28-12.34)	2,810 (480-3,990)	12.1 (2.1-17.2)
	25+60+60	1.72	4.14	4.14			10.00 (3.30-12.35)	2,740 (480-3,990)	11.8 (2.1-17.2)
	25+60+71	1.60	3.85	4.55			10.00 (3.31-12.40)	2,740 (480-3,980)	11.8 (2.1-17.1)
	35+35+35	3.14	3.14	3.14			9.42 (3.08-10.51)	3,110 (480-3,580)	13.4 (2.1-15.4)
	35+35+50	2.92	2.92	4.16			10.00 (3.19-11.63)	3,090 (480-3,930)	13.3 (2.1-16.9)
	35+35+60	2.69	2.69	4.62			10.00 (3.21-11.74)	3,020 (480-3,930)	13.0 (2.1-16.9)
	35+35+71	2.48	2.48	5.04			10.00 (3.25-11.82)	2,950 (480-3,930)	12.7 (2.1-16.9)
	35+50+50	2.60	3.70	3.70			10.00 (3.27-12.28)	2,810 (480-3,990)	12.1 (2.1-17.2)
	35+50+60	2.41	3.45	4.14			10.00 (3.30-12.35)	2,740 (480-3,990)	11.8 (2.1-17.2)
	35+50+71	2.24	3.21	4.55			10.00 (3.31-12.40)	2,740 (480-3,980)	11.8 (2.1-17.1)
	35+60+60	2.26	3.87	3.87			10.00 (3.31-12.41)	2,740 (480-3,980)	11.8 (2.1-17.1)
	50+50+50	3.33	3.33	3.33			10.00 (3.32-12.61)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+20+20+20	2.00	2.00	2.00	2.00		8.00 (3.20-11.20)	1,960 (480-3,490)	8.4 (2.1-15.0)
	20+20+20+25	2.00	2.00	2.50			8.50 (3.20-11.20)	2,190 (480-3,490)	9.4 (2.1-15.0)
	20+20+20+35	2.00	2.00	3.50			9.50 (3.21-11.77)	2,690 (480-3,930)	11.6 (2.1-16.9)
	20+20+20+50	1.82	1.82	1.82	4.54		10.00 (3.28-12.37)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+20+60	1.67	1.67	1.67	4.99		10.00 (3.29-12.43)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+20+71	1.53	1.53	1.53	5.41		10.00 (3.30-12.48)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+25+25	2.00	2.00	2.50	2.50		9.00 (3.20-11.67)	2,430 (480-3,930)	10.4 (2.1-16.9)
	20+20+25+35	2.00	2.00	2.50	3.50		10.00 (3.21-11.77)	3,020 (480-3,930)	13.0 (2.1-16.9)
	20+20+25+50	1.74	1.74	2.17	4.35		10.00 (3.28-12.37)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+25+60	1.60	1.60	2.00	4.80		10.00 (3.29-12.43)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+25+71	1.47	1.47	1.84	5.22		10.00 (3.30-12.48)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+35+35	1.82	1.82	3.18	3.18		10.00 (3.22-11.87)	2,950 (480-3,930)	12.7 (2.1-16.9)
	20+20+35+50	1.60	1.60	2.80	4.00		10.00 (3.29-12.43)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+35+60	1.48	1.48	2.59	4.45		10.00 (3.30-12.49)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+20+35+71	1.37	1.37	2.40	4.86		10.00 (3.31-12.52)	2,670 (480-3,980)	11.5 (2.1-17.1)
	20+20+50+50	1.43	1.43	3.57	3.57		10.00 (3.33-12.68)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+20+50+60	1.33	1.33	3.33	4.01		10.00 (3.34-12.69)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+25+25+25	2.00	2.50	2.50	2.50		9.50 (3.20-11.67)	2,750 (480-3,930)	11.8 (2.1-16.9)
	20+25+25+35	1.90	2.38	2.38	3.34		10.00 (3.21-11.77)	3,020 (480-3,930)	13.0 (2.1-16.9)
	20+25+25+50	1.67	2.08	2.08	4.17		10.00 (3.28-12.37)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+25+25+60	1.54	1.92	1.92	4.62		10.00 (3.29-12.43)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+25+25+71	1.42	1.77	1.77	5.04		10.00 (3.30-12.48)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+25+35+35	1.74	2.18	3.04	3.04		10.00 (3.22-11.87)	2,950 (480-3,930)	12.7 (2.1-16.9)
	20+25+35+50	1.54	1.92	2.69	3.85		10.00 (3.29-12.43)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+25+35+60	1.43	1.79	2.50	4.28		10.00 (3.30-12.49)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+25+35+71	1.32	1.66	2.32	4.70		10.00 (3.31-12.52)	2,670 (480-3,980)	11.5 (2.1-17.1)
	20+25+50+50	1.38	1.72	3.45	3.45		10.00 (3.33-12.68)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+25+50+60	1.29	1.61	3.23	3.87		10.00 (3.34-12.69)	2,600 (480-3,960)	11.2 (2.1-17.1)
	20+35+35+35	1.60	2.80	2.80	2.80		10.00 (3.24-11.96)	2,880 (480-3,920)	12.4 (2.1-16.9)
	20+35+35+50	1.43	2.50	2.50	3.57		10.00 (3.30-12.48)	2,740 (480-3,980)	11.8 (2.1-17.1)
	20+35+35+60	1.33	2.33	2.33	4.01		10.00 (3.31-12.53)	2,670 (480-3,970)	11.5 (2.1-17.1)
	20+35+50+50	1.29	2.25	3.23	3.23		10.00 (3.34-12.69)	2,600 (480-3,960)	11.2 (2.1-17.1)
	25+25+25+25	2.50	2.50	2.50	2.50		10.00 (3.20-11.67)	3,090 (480-3,930)	13.3 (2.1-16.9)</td

240 V, 50 Hz

240 V, 50 Hz

Outdoor unit	Combinations of indoor units	Capacity of each indoor unit (kW)					Total capacity (kW) Rated (Min.-Max.)	Total power consumption (W) Rated (Min.-Max.)	Total current (A) Rated (Min.-Max.)
		A room	B room	C room	D room	E room			
5MXS100LVMA	20+50+50	1.84	4.58	4.58			11.00 (2.79-12.14)	2,700 (450-3,380)	11.6 (2.0-14.6)
	20+50+60	1.69	4.23	5.08			11.00 (2.79-12.14)	2,670 (440-3,340)	11.5 (1.9-14.4)
	20+50+71	1.56	3.90	5.54			11.00 (2.78-12.13)	2,580 (440-3,220)	11.1 (1.9-13.9)
	20+60+60	1.58	4.71	4.71			11.00 (2.79-12.14)	2,640 (440-3,300)	11.3 (1.9-14.2)
	20+60+71	1.46	4.37	5.17			11.00 (2.78-12.12)	2,560 (440-3,190)	11.0 (1.9-13.8)
	25+25+25	3.07	3.07	3.07			9.20 (2.81-11.64)	2,330 (460-3,400)	10.0 (2.0-14.7)
	25+25+35	2.86	2.86	3.99			9.71 (2.81-11.78)	2,460 (460-3,450)	10.6 (2.0-14.9)
	25+25+50	2.62	2.62	5.24			10.48 (2.80-12.14)	2,630 (450-3,600)	11.3 (2.0-15.5)
	25+25+60	2.50	2.50	6.00			11.00 (2.80-12.15)	2,820 (450-3,550)	12.1 (2.0-15.3)
	25+25+71	2.27	2.27	6.46			11.00 (2.80-12.14)	2,720 (450-3,410)	11.7 (2.0-14.7)
	25+35+35	2.69	3.77	3.77			10.23 (2.81-12.14)	2,640 (460-3,710)	11.3 (2.0-16.0)
	25+35+50	2.50	3.50	5.00			11.00 (2.80-12.15)	2,810 (450-3,540)	12.1 (2.0-15.3)
	25+35+60	2.29	3.21	5.50			11.00 (2.80-12.15)	2,770 (450-3,490)	11.9 (2.0-15.0)
	25+35+71	2.10	2.94	5.96			11.00 (2.79-12.14)	2,680 (440-3,360)	11.5 (1.9-14.5)
	25+50+50	2.20	4.40	4.40			11.00 (2.79-12.14)	2,700 (450-3,380)	11.6 (2.0-14.6)
	25+50+60	2.04	4.07	4.89			11.00 (2.79-12.14)	2,670 (440-3,340)	11.5 (1.9-14.4)
	25+50+71	1.88	3.77	5.35			11.00 (2.78-12.13)	2,580 (440-3,220)	11.1 (1.9-13.9)
	25+60+60	1.90	4.55	4.55			11.00 (2.79-12.14)	2,640 (440-3,300)	11.3 (1.9-14.2)
	25+60+71	1.76	4.23	5.01			11.00 (2.78-12.12)	2,560 (440-3,190)	11.0 (1.9-13.8)
	35+35+35	3.58	3.58	3.58			10.74 (2.80-12.14)	2,770 (450-3,640)	11.9 (2.0-15.7)
	35+35+50	3.21	3.21	4.58			11.00 (2.80-12.15)	2,760 (450-3,470)	11.9 (2.0-15.0)
	35+35+60	2.96	2.96	5.08			11.00 (2.80-12.15)	2,730 (450-3,430)	11.7 (2.0-14.8)
	35+35+71	2.73	2.73	5.54			11.00 (2.79-12.14)	2,640 (440-3,300)	11.3 (1.9-14.2)
	35+50+50	2.86	4.07	4.07			11.00 (2.79-12.14)	2,660 (440-3,330)	11.4 (1.9-14.4)
	35+50+60	2.66	3.79	4.55			11.00 (2.79-12.13)	2,630 (440-3,290)	11.3 (1.9-14.2)
	35+50+71	2.47	3.53	5.00			11.00 (2.78-12.12)	2,550 (440-3,180)	11.0 (1.9-13.7)
	35+60+60	2.48	4.26	4.26			11.00 (2.78-12.13)	2,600 (440-3,250)	11.2 (1.9-14.0)
	50+50+50	3.67	3.67	3.67			11.00 (2.78-12.12)	2,560 (440-3,200)	11.0 (1.9-13.8)
	20+20+20+20	2.41	2.41	2.41			9.62 (3.10-11.70)	2,170 (490-2,940)	9.3 (2.2-12.7)
	20+20+20+25	2.34	2.34	2.94			9.96 (3.10-11.83)	2,260 (490-3,030)	9.7 (2.2-13.1)
	20+20+20+35	2.24	2.24	3.93			10.65 (3.09-12.50)	2,470 (490-3,650)	10.6 (2.2-15.7)
	20+20+20+50	2.00	2.00	5.00			11.00 (3.08-12.50)	2,490 (480-3,520)	10.7 (2.1-15.2)
	20+20+20+60	1.83	1.83	5.51			11.00 (3.08-12.50)	2,470 (480-3,490)	10.6 (2.1-15.0)
	20+20+20+71	1.68	1.68	5.96			11.00 (3.06-12.50)	2,460 (480-3,390)	10.6 (2.1-14.6)
	20+20+25+25	2.29	2.29	2.86	2.86		10.31 (3.10-12.50)	2,360 (490-3,710)	10.1 (2.2-16.0)
	20+20+25+35	2.20	2.20	2.75	3.85		11.00 (3.09-12.50)	2,570 (490-3,650)	11.0 (2.2-15.7)
	20+20+25+50	1.91	1.91	2.39	4.79		11.00 (3.08-12.50)	2,490 (480-3,520)	10.7 (2.1-15.2)
	20+20+25+60	1.76	1.76	2.20	5.28		11.00 (3.08-12.50)	2,470 (480-3,490)	10.6 (2.1-15.0)
	20+20+25+71	1.62	1.62	2.02	5.74		11.00 (3.06-12.50)	2,460 (480-3,390)	10.6 (2.1-14.6)
	20+20+35+35	2.00	2.00	3.50	3.50		11.00 (3.09-12.50)	2,530 (490-3,600)	10.9 (2.2-15.5)
	20+20+35+50	1.76	1.76	3.08	4.40		11.00 (3.07-12.50)	2,460 (480-3,470)	10.6 (2.1-15.0)
	20+20+35+60	1.63	1.63	2.85	4.89		11.00 (3.07-12.50)	2,440 (480-3,440)	10.5 (2.1-14.8)
	20+20+35+71	1.51	1.51	2.64	5.34		11.00 (3.06-12.50)	2,430 (470-3,360)	10.4 (2.1-14.5)
	20+20+50+50	1.57	1.57	3.93	3.93		11.00 (3.06-12.50)	2,440 (480-3,370)	10.5 (2.1-14.5)
	20+20+50+60	1.47	1.47	3.67	4.39		11.00 (3.05-12.50)	2,430 (470-3,350)	10.4 (2.1-14.4)
	20+25+25+25	2.25	2.80	2.80			10.65 (3.10-12.50)	2,500 (490-3,710)	10.7 (2.2-16.0)
	20+25+25+35	2.10	2.62	2.62	3.66		11.00 (3.09-12.50)	2,570 (490-3,650)	11.0 (2.2-15.7)
	20+25+25+50	1.83	2.29	2.29	4.59		11.00 (3.08-12.50)	2,490 (480-3,520)	10.7 (2.1-15.2)
	20+25+25+60	1.69	2.12	2.12	5.07		11.00 (3.08-12.50)	2,470 (480-3,490)	10.6 (2.1-15.0)
	20+25+25+71	1.56	1.95	1.95	5.54		11.00 (3.06-12.50)	2,460 (480-3,390)	10.6 (2.1-14.6)
	20+25+35+35	1.91	2.39	3.35	3.35		11.00 (3.09-12.50)	2,530 (490-3,600)	10.9 (2.2-15.5)
	20+25+35+50	1.69	2.12	2.96	4.23		11.00 (3.07-12.50)	2,460 (480-3,470)	10.6 (2.1-15.0)
	20+25+35+60	1.57	1.96	2.75	4.72		11.00 (3.07-12.50)	2,440 (480-3,440)	10.5 (2.1-14.8)
	20+25+35+71	1.46	1.82	2.55	5.17		11.00 (3.06-12.50)	2,430 (470-3,360)	10.4 (2.1-14.5)
	20+25+50+50	1.52	1.90	3.79	3.79		11.00 (3.06-12.50)	2,440 (480-3,370)	10.5 (2.1-14.5)
	20+25+50+60	1.42	1.77	3.55	4.26		11.00 (3.05-12.50)	2,430 (470-3,350)	10.4 (2.1-14.4)
	20+35+35+35	1.76	3.08	3.08			11.00 (3.08-12.50)	2,500 (490-3,550)	10.7 (2.2-15.3)
	20+35+35+50	1.57	2.75	2.75					

MEMO

MEMO